


PULASTIC CLASSIC 60

A seamless multi-purpose sports floor that provides comfort and safety for all levels of play and performance

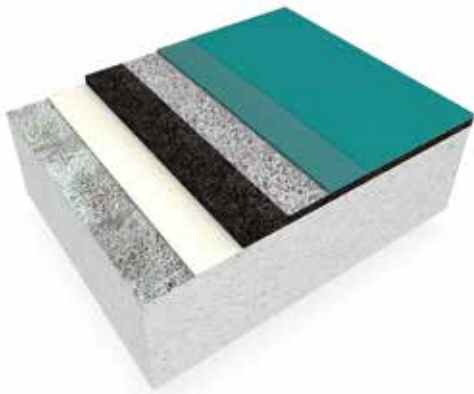

PULASTIC®
SPORTS FLOORING

- Approved by FIBA and IHF
- Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
- Good resiliency for comfort and injury prevention
- Seamless, non-porous and smooth surface for easy maintenance, repair and resurface options
- Excellent contact noise reduction for outstanding acoustic isolation
- Sustainability through high content of recycled and rapidly renewable raw materials
- Water based finish for very low odor during installation and maximum indoor clean air protection during use
- Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability















PROVEN
Safety

PROVEN
Performance

PROVEN
Winners

INDOOR | MULTI-PURPOSE | BASKETBALL | VOLLEYBALL
AEROBICS | TRAINING FACILITY | GYMNASTICS

Product Specifications

 Nominal Thickness	6 mm	
 Character	Point-Elastic	
 Shock Absorption	12%	EN 14808
 Vertical Deformation	0.6 mm	EN 14809
 Ball Bounce	98%	EN 12235
 Resistance to Rolling Load	≥ 1500 N	EN 1569
 Resistance to Impact	≥ 800 gr @ 10°C	EN 1517
	≥ 1200 gr @ 17°C	EN 1517
 Resistance to Indentation	0.35 mm @ 5 min	EN 1516
	0.15 mm @ 24 hrs	EN 1516
 V.O.C. Content- Adhesive	Solvent Free	
V.O.C. Content- Finish 	45 gr/lit	ASTM D 3960
 Elongation at break- Structure	150%	DIN 53455
Tensile Strength- Structure	8 N/mm ²	DIN 53455
Tear Strength- Structure	25 N/mm	DIN 53515
 Warranty	25 YEAR manufacturer's warranty	

16 Classic Colors to Choose From



*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.

Classic 60 Meets the Following Organizational Approvals



robbinsfloor.com | 1.800.543.1913