



**Stagecraft
Industries, Inc.**

5051 N. Lagoon Ave., Portland, OR 97217-7693
 PO Box 4442, Portland, OR 97208-4442
 503-286-1600 503-286-3345 fax

Visit us at www.stagecraftindustries.com

QUOTATION / BILL OF MATERIALS

- 5503 Sixth Ave., Seattle, WA 98108-2503
 PO Box 80191, Seattle, WA 98108-0191
 206-763-8800 206-763-1324 fax
- 641 62nd Street, Oakland, CA 94609
 510-655-2582 510-655-2819 fax

September 18, 2012

Sheridan School District
 435 S. Bridge St.
 Sheridan, OR 97378

(503) 843-2433 phone
 (503) 843-3505 fax
aj.grauer@sheridan.k12.or.us



Quotation Number: 1209.0521r1grg
 Attn.: A.J. Grauer - Superintendent

We are pleased to provide a quote for the following project:
Faulconer Chapman School - Sheridan, Oregon
Stage Lighting, Distribution, Dimming & Control

Provide:

- (6) ETC 19° ETC Source Four Ellipsoidal Spotlights: EA Includes: 750w Lamp, C-Clamp, Color Frame, Safety Cable, and GSP Connector Installed. (Front of House Side Walls)
- (6) ETC Source Four PAR Wash lights: EA Includes: 750w Lamp, C-Clamp, Color Frame, Safety Cable, and GSP Connector Installed. (On-Stage back of Proscenium Wall)
- (4) SCI 4 Stagecraft Custom Vertical Connector Strips, 4 ft. long, each containing: (4) 20A Circuits Distributed over 4 GSP Flush Mount Receptacles for dim circuits. 4' 1-1/2" Sch40 Batten, 2 Hanging Brackets for wall mount, & Circuit ID's on face.
- (1) SCI Labor to mount (4) Electrical Raceways & hang 12 Fixtures is included.
- (1) Lightronic AR1202 12 Channel, 2400W Wall Mt. Dimmer **wiBuilt In Wireless DMX** (upgrade from 6ckt)
- (1) Lightronic TL5024 12/24 Channel Light Board **wiBuilt In Wireless DMX** (upgrade from 6ch)
- (1) Lightronic AF3007 6 Scene Fader Station (back box by others)

Customer's cost Delivered and installed.....\$ 13,519.00

Please Note Exclusions / Comments:

Terms: Net 30 Days, Upon Approved Credit. Prices Good 30 Days from Above Date. Sufficient structural support for Raceways by others. Electrical Hookup by Others. Price does not include submittal drawings. Price does not include installation of above Dimming & Control equipment.. All lighting system field wiring, conduit, pull boxes, back boxes, and accessories necessary to interconnect the lighting system control station to the dimmer, the wall dimmer to power sources, and the dimmers to the lighting load receptacles, and house lighting fixtures are not included and is to be provided by your electrical contractor.

Contractors Licenses
 AK - 5095 • AZ - 129893 L-05 • CA - 252177 • HI - C15872 • ID - 11989-AAA-4(10150) • IA - 45610-97 • MS - 10626
 MT - 5442 • NM - 060655 • NV - 0012299 • OR - 065050 • VA -2705 009939 A • WA - STAGEI*365R8

Signature of Purchaser _____ Date _____ Stagecraft Authorized Signature Gary Graham 262 Extension
 Printed Name _____ Printed Name Gary Graham



Visit us at www.stagecraftindustries.com

QUOTATION / BILL OF MATERIALS

- 5503 Sixth Ave., Seattle, WA 98108-2503
 PO Box 80191, Seattle, WA 98108-0191
 206-763-8800 206-763-1324 fax
- 641 62nd Street, Oakland, CA 94609
 510-655-2582 510-655-2819 fax

September 17, 2012

Sheridan School District
 435 S. Bridge St.
 Sheridan, OR 97378

(503) 843-2433 phone
 (503) 843-3505 fax
aj.grauer@sheridan.k12.or.us



Quotation Number: 1209.0521grg
 Attn.: A.J. Grauer - Superintendent

We are pleased to provide a quote for the following project:
Faulconer Chapman School - Sheridan, Oregon
Stage Lighting, Distribution, Dimming & Control

Provide:

- (6) ETC 19° ETC Source Four Ellipsoidal Spotlights: EA Includes: 750w Lamp, C-Clamp, Color Frame, Safety Cable, and GSP Connector Installed. (Front of House Side Walls)
- (6) ETC Source Four PAR Wash lights: EA Includes: 750w Lamp, C-Clamp, Color Frame, Safety Cable, and GSP Connector Installed. (On-Stage back of Proscenium Wall)
- (4) SCI 4 Stagecraft Custom Vertical Connector Strips, 4 ft. long, each containing: (4) 20A Circuits Distributed over 4 GSP Flush Mount Receptacles for dim circuits. 4' 1-1/2" Sch40 Batten, 2 Hanging Brackets for wall mount, & Circuit ID's on face.
- (1) SCI Labor to mount (4) Electrical Raceways & hang 12 Fixtures is included.
- (1) Lightronic AR602 6 Channel, 2400W Wall Mt. Dimmer
- (1) Lightronic TL4008 8 Channel Light Board w/DMX
- (1) Lightronic AF3007 6 Scene Fader Station (back box by others)
- (1) Lightronic CP501 Single Gang Wall Plate w/5 Pin Male DMX (back box by others)
- (1) Lightronic 50' 5 pin DMX Control Cable


Customer's cost Delivered and installed.....\$ 11,100.00

Please Note Exclusions / Comments:


Terms: Net 30 Days, Upon Approved Credit. Prices Good 30 Days from Above Date. Sufficient structural support for Raceways by others. Electrical Hookup by Others. Price does not include submittal drawings. Price does not include installation of above Dimming & Control equipment.. All lighting system field wiring, conduit, pull boxes, back boxes, and accessories necessary to interconnect the lighting system control station to the dimmer, the wall dimmer to power sources, and the dimmers to the lighting load receptacles, and house lighting fixtures are not included and is to be provided by your electrical contractor.

Contractors Licenses
 AK - 5095 • AZ - 129893 L-05 • CA - 252177 • HI - C15872 • ID - 11989-AAA-4(10150) • IA - 45610-97 • MS - 10626
 MT - 5442 • NM - 060655 • NV - 0012299 • OR - 065050 • VA - 2705 009939 A • WA - STAGEI*365R8

Signature of Purchaser _____ Date _____ Stagecraft Authorized Signature Gary Graham 262 Extension _____
 Printed Name _____ Printed Name Gary Graham

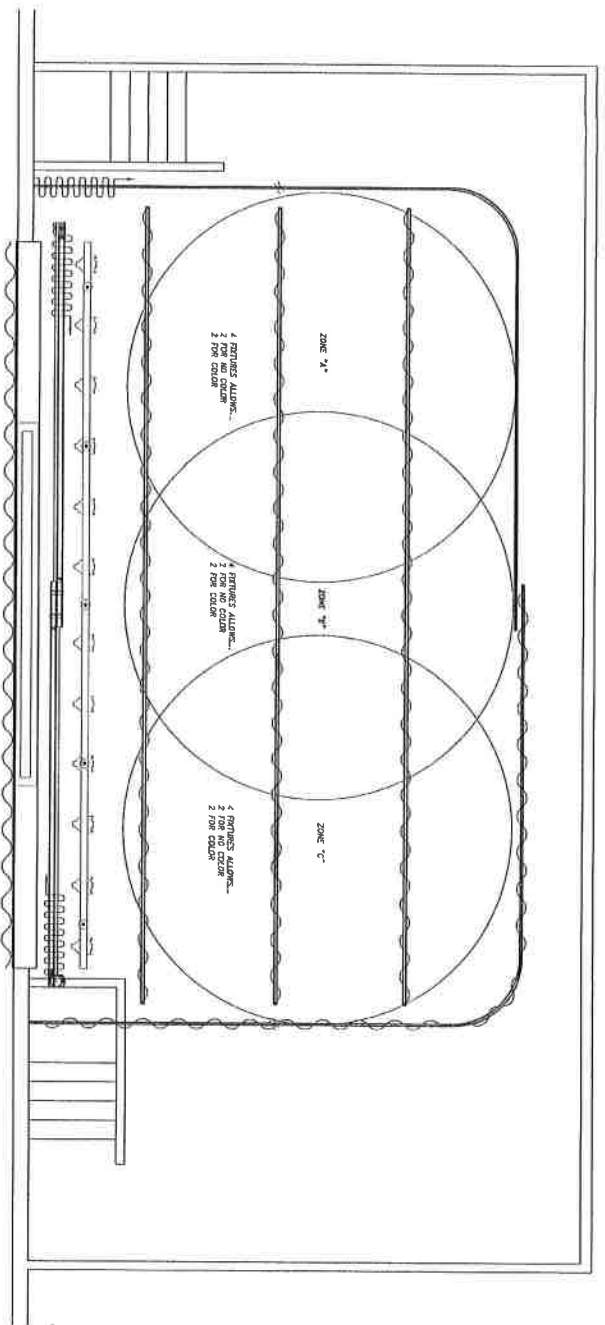

1 PLAN VIEW OF PLATFORM
SCALE: 3/16" = 1'-0"

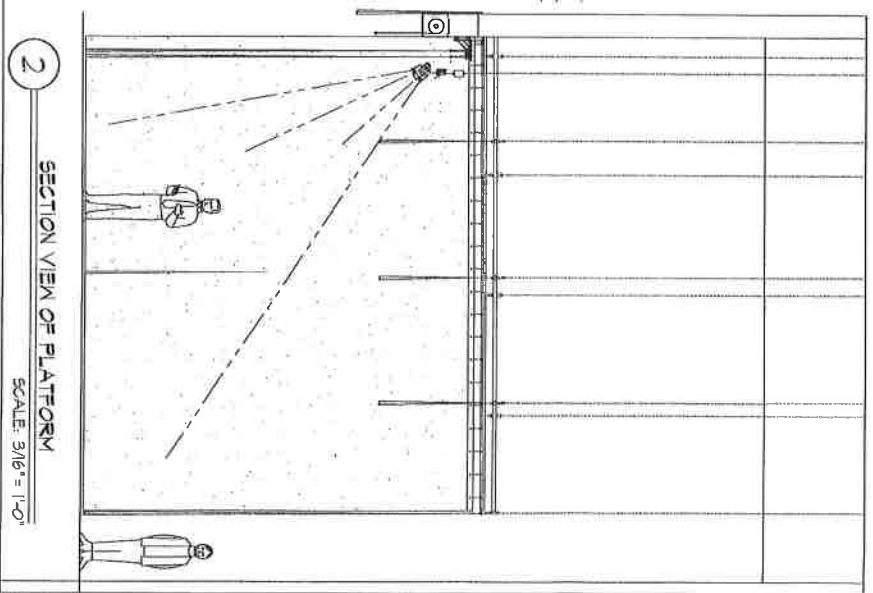

2 SECTION VIEW OF PLATFORM
SCALE: 3/16" = 1'-0"

CUSTOMERS PROSPECT DRAWING ONLY

Stagecraft Industries, Inc.
 P.O. BOX 442, 5051 N. LAGOON AVE
 PORTLAND, OR 97208, PORTLAND, OR 97217
 Phone: 503-286-1800, Fax: 503-286-5345
 Web: www.stagecraftindustries.com

Drawing Title:
 Faulconer, Chapman School-Sheridan, OR
Date:
 9/12/12