



2999 St. Vincent Avenue, PO Box 1309  
La Salle, IL 61301  
Ph: 815-223-9800

PROPOSAL #: 18565  
DATE: 1/29/2025  
PROJECT: JFK CAFETERIA FIXTURES

JFK CAFETERIA FIXTURES  
SPRING VALLEY, IL

Description: Remove and dispose of (19) existing pendant mount fixtures. (Turn over to owner if wanted) Furnish and install (19) Spitzer SCLB-D120-D150L-120L-S-35K-WH-C1-D1 fixtures in place of existing pendant mount fixtures. (Spec sheet below)

**Total Cost ..... \$55,244.00**

Additional fixtures for attic stock = \$2,150 each if needed

PAYMENT TERMS: \_\_\_\_\_ 1.5% interest per month 18% per year due on all accounts 30 days past due.

All work to be completed as provided herein. Any Alteration or deviation from above specifications involving extra costs must be in writing. The cost of the alterations or deviation shall be in addition to the above estimate. Proposal withdrawn 30 days from above date. THIS PROPOSAL IS FURTHER SUBJECT TO THE TERMS, CONDITIONS, AND DEFINITIONS SET FORTH ON THE BACK OF THIS PROPOSAL.

ACCEPTANCE OF PROPOSAL: The above prices, specifications and conditions are satisfactory and are hereby accepted. JB Contracting Corp. ("Contractor") is authorized to begin the job specified herein. The undersigned represents and warrants that the undersigned is an authorized agent of Purchaser.

Date of Acceptance: \_\_\_\_\_

JB Contracting Corporation - Matt Cochran x 218

By: \_\_\_\_\_  
Authorized Agent

---

Purchaser:

By: \_\_\_\_\_  
Authorized Agent

## Architectural Round Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### KEY FEATURES

- Stunningly designed round low profile 2.2" (Sol) and 3" (Sol Bezel) aluminum luminaire
- Frosted diffuser & micro prismatic lens delivers a low-glare visual comforting direct & indirect illumination
- Standard 90CRI and 0-10V dim to 1% lighting control and a 3-SDCM color consistency
- Bezel version offer a sharp regressed edge provides a refined elegance
- Multiple color housing finish options to meet any design application


### TECHNICAL SUMMARY

SIZE:	Standard OD: 1.5' (D45), 2' (D60), 2.5' (D75), 3' (D90), 4' (D120)
WATTAGE:	30W/40W/50W/60W/80W/100W/120W/150W, custom option available
LUMEN/EFFICACY	3000/4000/6000/8000/10000/12000/15000LM, 100LM/W, custom option available
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3500/4000K selectable, custom option available / CRI >90
CONTROL	0-10V dimming, dim to 1% to off standard
VALIDATIONS	ETL damp location listed, FCC compliant, RoHS
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	-5°F ~ 104°F
FINISH	Matte white & black standard. Optional: metallic silver, fabulous red, golf green, bright orange, amber yellow, wood brown, custom

\*Delivered lumen may vary, refer to photometric for full performance data





Available Finish



### DIMENSIONS

MODEL #	D45	D60	D75	D90	D120
SCLR	11 lbs	13 lbs	27 lbs	29 lbs	45 lbs
SCLB	12 lbs	14 lbs	28 lbs	30 lbs	46 lbs

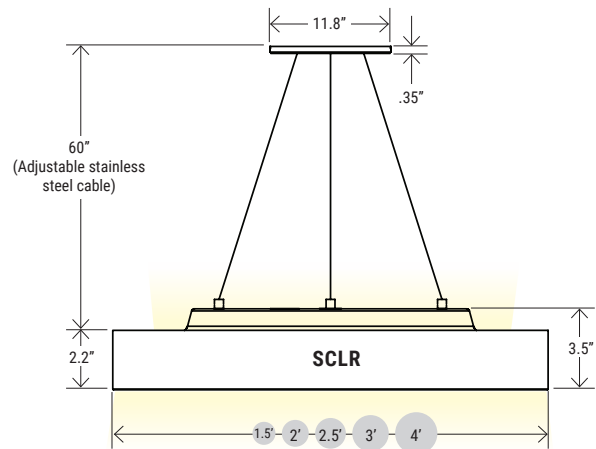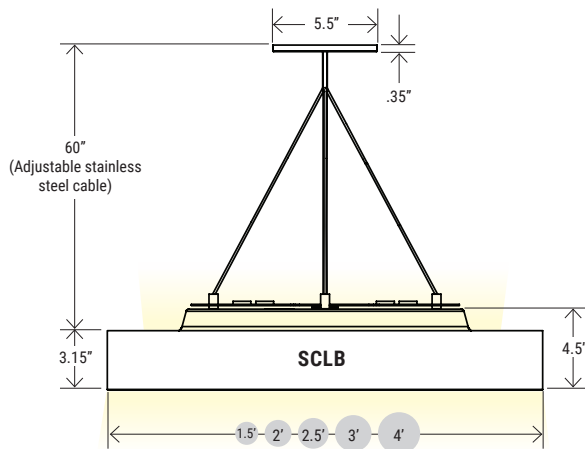

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### ORDERING INFORMATION

\*Additional cost and/or lead time on customized fixtures may apply.

[ ]	-	[ ]	-	[ ]	-	[ ]	-	[ ]	-	[ ]
Series	Size	Lumen Package	Mounting	CCT	Finish	Control	Light Distribution			
<b>SCLR</b> (SOL)	<b>D45</b> - (1.5')	<b>30L</b> - (3000lm)	<b>S</b> - (Suspended) <b>C</b> - (Ceiling Surface Mount)	<b>35K</b> - (3500K) <b>40K</b> - (4000K) <b>CS</b> - (Custom single color)	<b>BK</b> - (Matte Black) <b>WH</b> - (Matte White) <b>ME</b> - (Metallic Silver)** <b>RD</b> - (Fabulous Red)** <b>GR</b> - (Golf Green)** <b>OR</b> - (Bright Orange)** <b>YL</b> - (Amber Yellow)** <b>WB</b> - (Wood Brown)** <b>RAL</b> - (Custom Color)**	<b>C1</b> - (0-10V, 1%)	<b>DI</b> - (Direct and indirect) <b>DO</b> - (Direct only)			
		<b>40L</b> - (4000lm)								
	<b>D60</b> - (2')	<b>40L</b> - (4000lm)								
		<b>60L</b> - (6000lm)								
	<b>D75</b> - (2.5')	<b>60L</b> - (6000lm)								
		<b>80L</b> - (8000lm)								
<b>SCLB</b> (SOL BEZEL)	<b>D90</b> - (3')	<b>80L</b> - (8000lm)								
		<b>100L</b> - (10000lm)								
	<b>D120</b> - (4')	<b>100L</b> - (10000lm)								
		<b>120L</b> - (12000lm)								
		<b>150L</b> - (15000lm)								
					(Made to order)**					

### \*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



MFR4  
4" IC Fire Rated Metallic  
Electrical J-box housing

### \*Accessories

- MFR4** - 4" Fire rated metallic electrical j-box housing
- EM1** - 21W Inverter remote mount and field installation

### SPECIFICATIONS

#### CONSTRUCTION

Low profile extruded aluminum housing with 18 gauge steel mounting plate, Bezel version comes with a sophisticated aesthetic regress edge.

#### FINISH

Matte white & black standard. Optional: metallic silver, fabulous red, golf green, bright orange, amber yellow, custom.

#### OPTICS/DIFFUSER

Deep frosted acrylic diffuser with low-glare micro-prismatic lens.

#### ELECTRICAL

Class 2, 120-277Vac, 0-10V 1% flicker-free driver, long life 35/40K CCT changeable direct/indirect LED engine. Indirect can be switch off in field.

#### MOUNTING

Pendant or surface.

#### VALIDATIONS





ETL damp location listed, FCC, RoHS

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



### Athena

An uncompromising solution. The Athena lighting control system empowers architects, lighting designers, electrical engineers, and facility managers with a native network of lighting, lighting controls, shades, and cloud-connected software that deliver exceptional experiences and building management.

	<p><b>A-WN-D01-RF-WH</b> Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p><b>A-WN-D01-RF-BK</b> Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p><b>A-WN-D01-OCC-WH</b> Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>
	<p><b>A-WN-D01-OCC-BK</b> Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>