



March 22, 2022

Lincoln Hall and Rutledge seal coat project 2022


SD74 Changed from SD64 to SD74 per Kim at Patriot, 4/14/22


Attn: Athi


Scope of Work _____ \$14,265.25

We will Seal coat all areas on provided plan. PPM will use a non-toxic polymer modified master seal product. We will clean and crack fill areas prior to sealing. Once asphalt sealant has cured we will restripe entire area per the original layout on provided plan.

Any deviations from provided plans will incur additional charges.

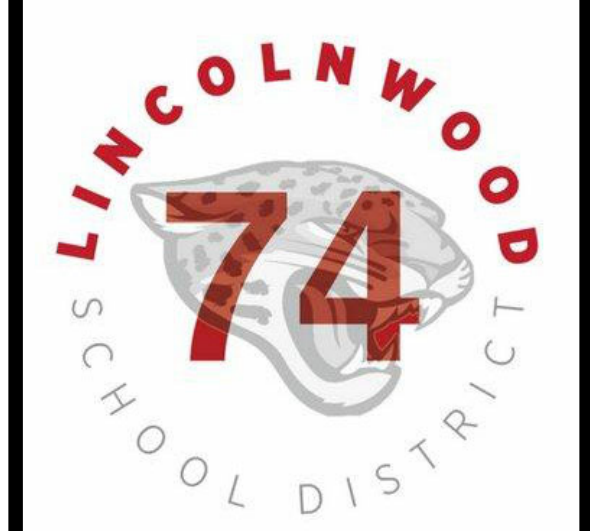

SITE DATA	
	EXISTING BITUMINOUS PAVEMENT TO BE CRACK FILLED, SEALCOATED (TWO COATS) AND STRIPED
	ASPHALT SEALCOAT = 86,050 SF (**) TOTAL
	ASPHALT CRACKFILL = 4,000 LF TOTAL
(**) - NOTE: ALL SQUARE FOOT FIGURES SHOWN ARE APPROXIMATE. CONTRACTOR IS RESPONSIBLE FOR SURVEYING SITE AND CALCULATING ACTUAL SQUARE/LINEAR FOOT FIGURES.	
GENERAL NOTES	
1.	EXACT DIMENSIONING OF SPACES AND LAYOUTS TO BE VERIFIED IN FIELD
2.	NEW STRIPING TO BE 4" WIDE AND MATCH EXISTING STRIPING PATTERN, U.N.O.
3.	ALL STRIPING PAINTED YELLOW EXCEPT AT DIRECTIONAL ARROWS AND CROSSWALK STRIPING, WHICH ARE TO BE PAINTED WHITE.
4.	WORK UNDER THE SCOPE OF THIS ALTERNATE IS LIMITED TO OCCURRING ON FRIDAYS, SATURDAYS, OR BETWEEN JULY 4-8 ONLY.

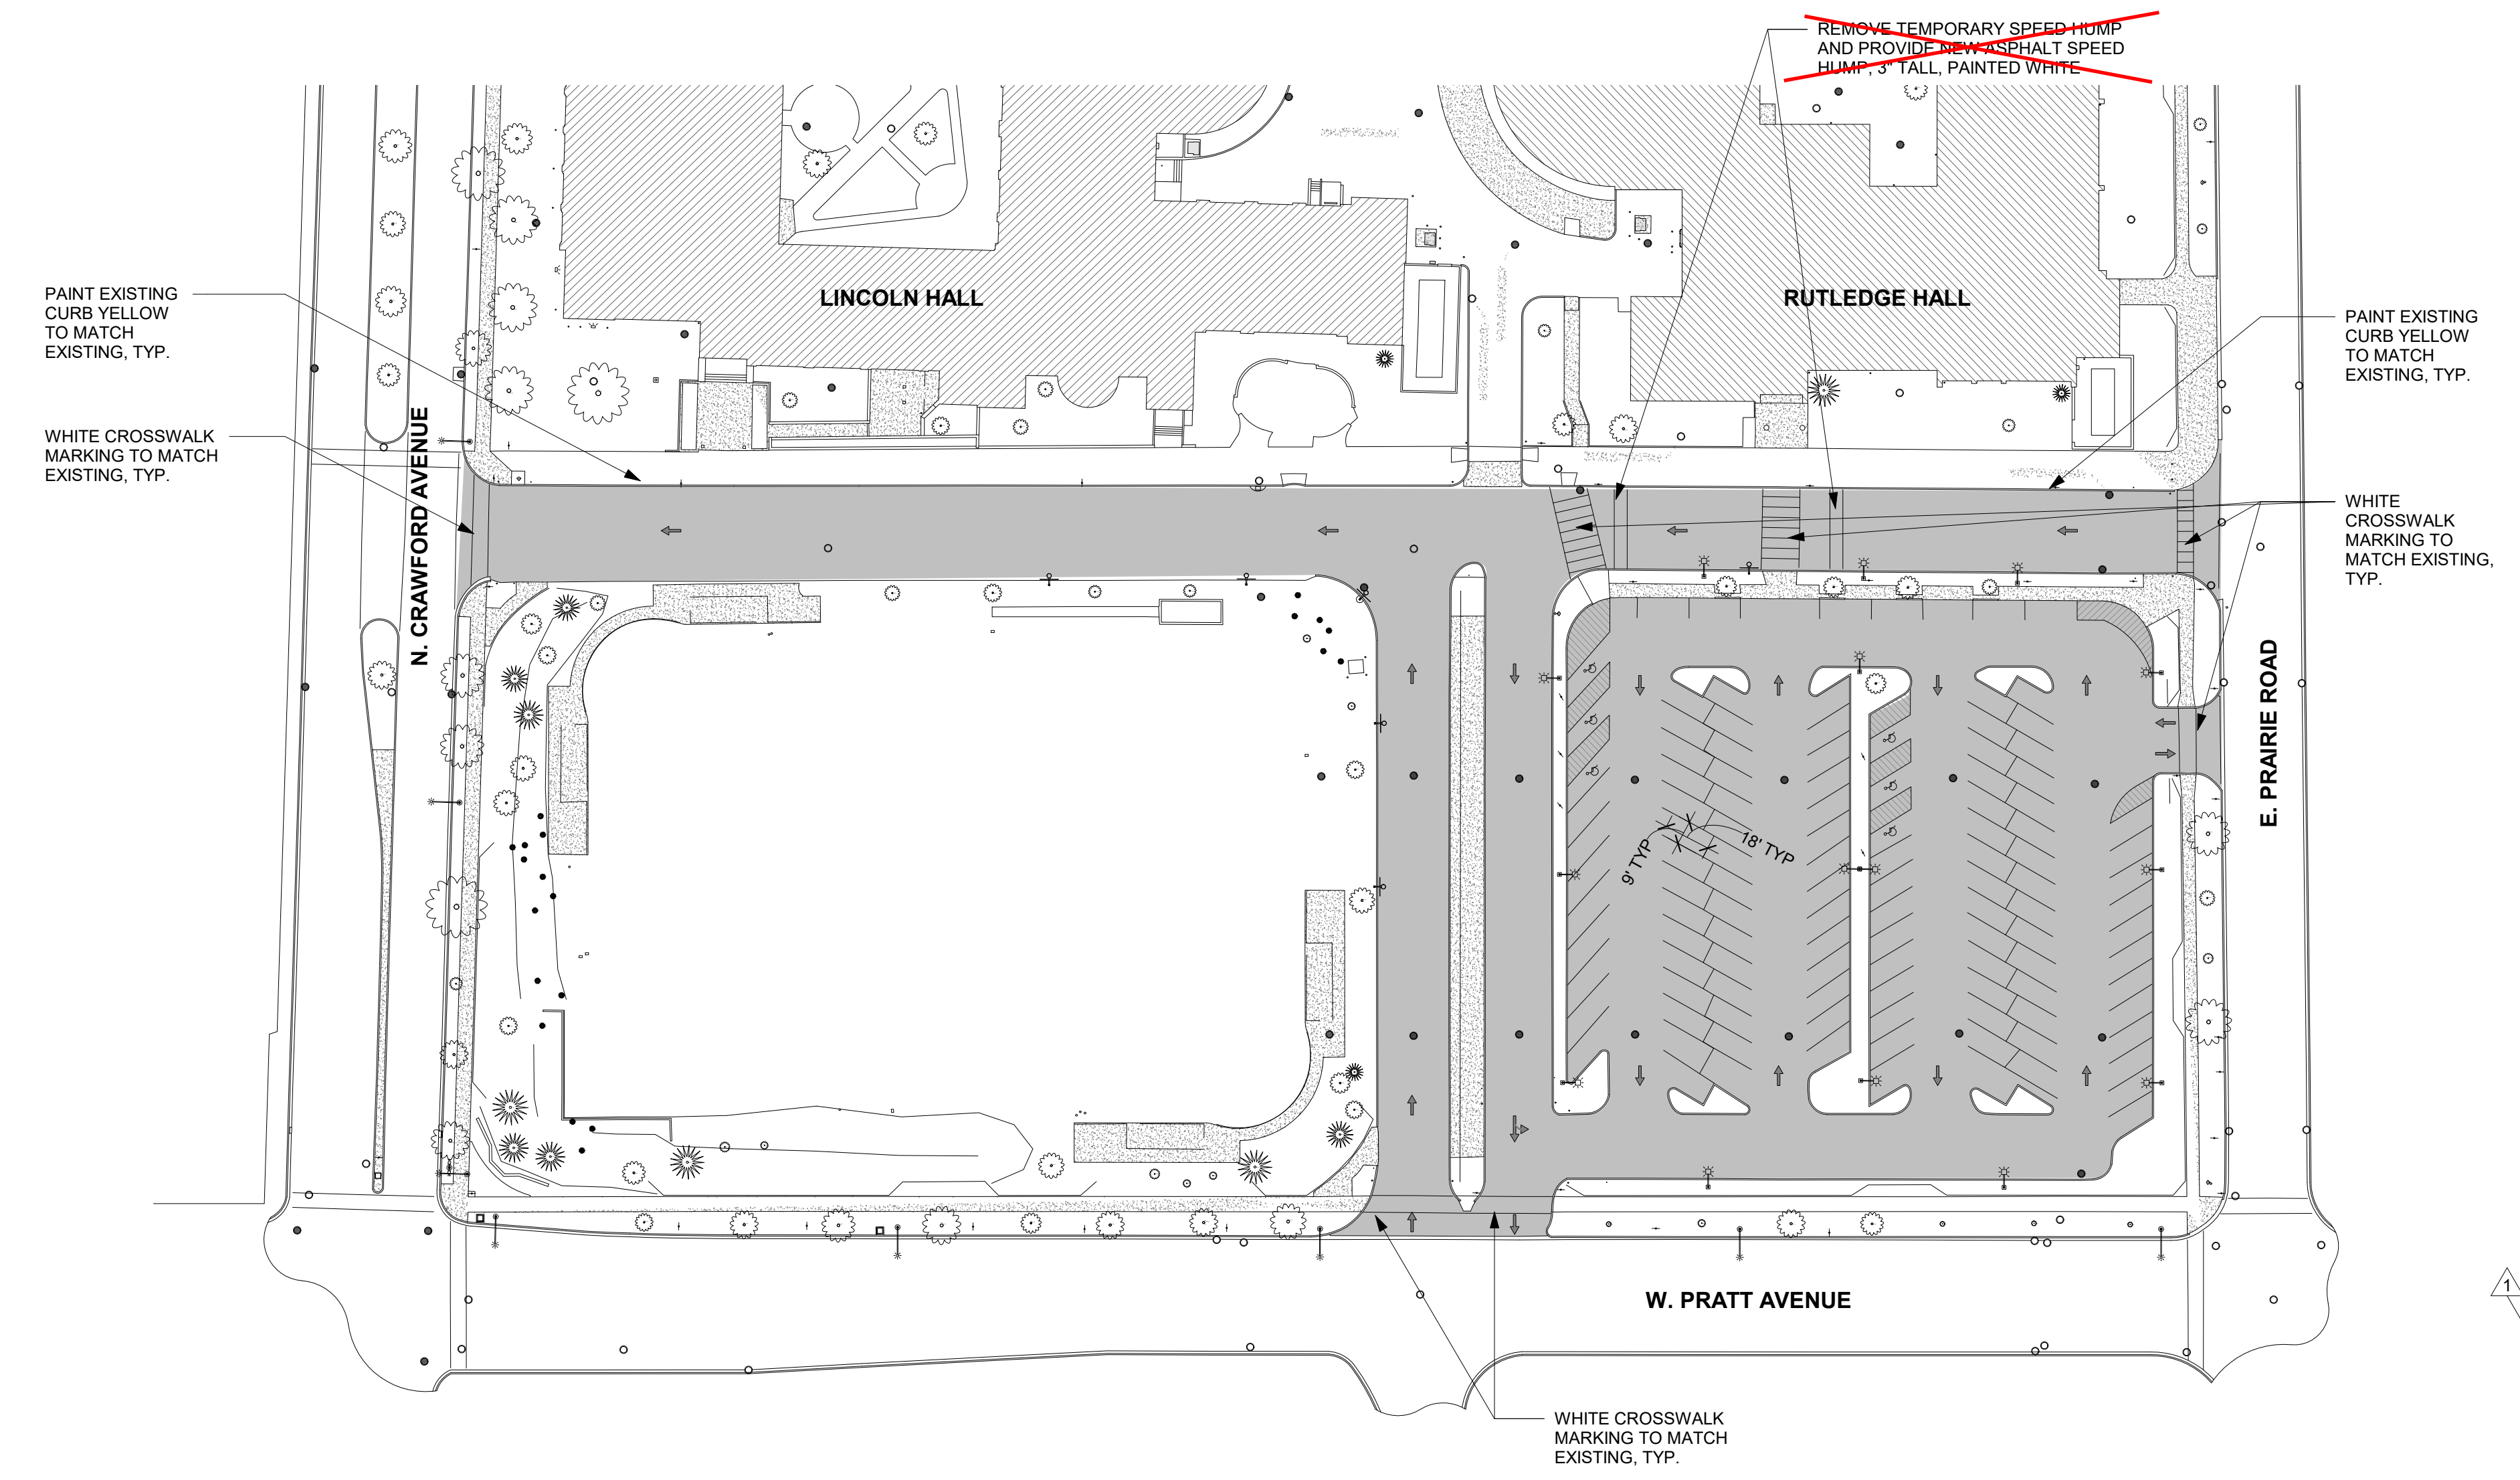

2022 SITEWORK RENOVATIONS

LINCOLNWOOD SD74
6950 E Prairie Road, Lincolnwood, IL 60712

NO	ISSUE	DATE
1	ADDENDUM 1	02/25/22

SEALCOATING PLAN - ALTERNATE 1

AC1.00

1 RUTLEDGE AND LINCOLN - SEALCOATING PLAN
1" = 50'-0"

WORK SHOWN ON THIS SHEET IS PART OF ALTERNATE NO. 1 ONLY.
BASE BID: EXISTING CONDITIONS THIS SHEET TO REMAIN AS IS