


Lincolnwood School District 74

Preliminary Options Campus Track



December 8, 2021

6950 N. East Prairie Road
Lincolnwood, IL 60712

SCOPE: This project includes the renovation/construction of a running/walking track on campus. The below is a comparison of two surfacing options for the track surface based upon preliminary discussions of track layout and sizing (existing sidewalk path, apx. 1,275 linear feet, expanded to 8' wide). The budget costs are for surfacing only, and do not include any subbase (concrete/asphalt) work or sitework excavation/prep.

Option A: Rekortan B Basemat System	Qty	Unit Cost	Budget Estimate
Single layer 11mm SBR/binder basemat	10,200 sf	\$6.00	\$61,200

Polyurethane 11mm basemat track system for force reduction

Permeable system

1/2" depth

Available in black only

3-year warranty

Restriping typically needed every 7-10 years

Option B: Rekortan BS Two Layer System	Qty	Unit Cost	Budget Estimate
Two layer 13mm SBR/binder basemat + spray	10,200 sf	\$8.00	\$81,600

Polyurethane 11mm basemat track system for force reduction, plus 2mm structural spray

Permeable system

1/2"+ depth


Colored options available, including 'Rainbow Blue' shown here

5-year warranty

Structural spray locks in basemat rubber for enhanced longevity

Lifespan can be 25-30 years with resurfacing every ~10 years

Restriping typically needed every 7-10 years

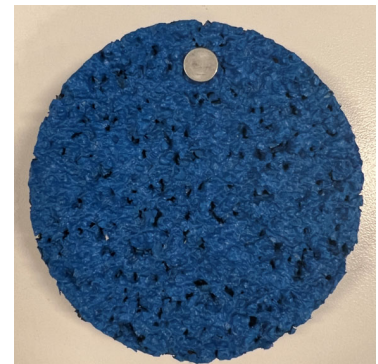

The above is the cost summary based on estimates of recently bid projects with consultation with manufacturers and installers. The recommended budget is the architect's opinion of construction costs for a general contractor to execute the work.

Sincerely yours, Athi Toufexis