# Alpena County **Erosion Control Permit Fee Schedule**

#### Transportation Facilities

To include but not limited to: streets, highways, roadways - public/private, trails and paths.

	<b>Plan Review</b>	Permit Fee	<b>Total</b>
Up to ½ mile	Included	\$160.00	\$160.00
Disturbance of <sup>1</sup> / <sub>2</sub> mile	Included	\$190.00	\$190.00
Each additional 1/2 mile or fraction thereof	Included	\$ 60.00	\$ 60.00

Industrial/Commercial Development

Review fees included in permit fee along with 3 inspections included in fee.

Up to one acre	included	\$260.00	\$260.00
Each additional acre	included	\$100.00	\$100.00

Commercial projects, greater than one acre, require sealed, engineered site plans with runoff calculations, and either a signed letter of acknowledgment or a letter of credit. If the inspector feels that it is necessary to have a professional engineer review the plans submitted to the County, all review costs will be paid for by the developer.

#### Utility and Corridor Development

To include but not limited to: underground cables, above ground major transmission cables, water mains and sewers.

0-3 feet wide disturbance	\$ 0.02	\$ 0.02	\$ 0.04
4-10 feet wide disturbance	\$ 0.03	\$ 0.03	\$ 0.06
>10 feet wide disturbance	\$ 0.05	\$ 0.05	\$ 0.10

#### Gravel and Sand Pit Excavation

To include any open pit greater than one acre in size, active or inactive. Generally a five year permit may differ if a signed agreement is made with the agent in advance.

Sand/Gravel Pit	\$150.00	\$40.00 x 5	\$350.00

#### Waterway Impoundment Construction or Improvements

To include but not limited to: ponds, seawalls, rip rap, etc.

Up to one acre	\$ included	\$160.00	\$160.00
Disturbance of one acre	\$ included	\$190.00	\$190.00
Additional acre or fraction thereof	\$ included	\$ 60.00	\$ 60.00

#### Septic Systems

To include septic system installation, replacement or repair not associated with other earth change activities.

Septic System	\$ included	\$160.00	\$160.00
Septic System	\$ Included	\$100.00	\$100.00

## Residential Construction and Miscellaneous Earth Changes

To include all single family dwellings, additions, barns, garages and subjects not covered by or within the above categories. 3 inspections included in fee.

Up to one acre	Included	\$160.00	\$160.00
Each additional acre	Included	\$ 75.00	\$75.00

\* Additional Site Inspections for any permit, beyond three, will be charged at a rate of \$50.00 per visit and will be billed to the landowner at the expiration of the permit.

Any projects, one acre or larger, with a storm water collection, or discharge point may require a storm water operator for the duration of the project. Any project five acres or larger shall require a certified storm water operator for the duration of the project.

MAKE CHECK PAYABLE TO: Alpena County Treasurer



# **PERMIT APPLICATION (For Part 91)** SOIL EROSION AND SEDIMENTATION CONTROL **Alpena County Soil Erosion**

720 W. Chisholm Street Suite 3 Alpena, MI 49707 989-354-9534

OFFICE USE	ONLY
------------	------

Permit Number

Date Issued

**Expiration Date** 

File Number

#### 1. APPLICANT (Please check if applicant is the landowner or designated agent\*)

Name	□ Landowner	Designated Agent			
Address					Email address
City			State	Zip Code	Area Code/Phone Number

#### 2. LOCATION

Section	Town	Range		City/Village	Township		County
Subdivisio	division Lot No.		Tax ID Number	Street Address			

#### 3. PROPOSED EARTH CHANGE

3.	PROPOSED EARTH CHANGE	Project Type:	□ Residential □ Industrial		family Balancing	Commercial
					Dalancing	
Desci	ribe Project					Size of Earth Change (acres or square feet)
Name	e of and Distance to Nearest Lake, Stream, or Dra	iin	Date Project to S	Start	Date Proj	ject to be Completed

#### 4. SOIL EROSION AND SEDIMENTATION CONTROL PLAN (Refer to Rule 323.1703)

Note: <u>complete</u>	sets of plans	Estimated Cost of Erosion and Sediment Control
must be attached.		
		Plan Preparer's Name and Phone Number with area code

#### 5. PARTIES RESPONSIBLE FOR EARTH CHANGE

Name of Landowner (if not provided i	in Box N	lo. 1 above)	Address				
City State				Zip Area Code/Phone Number			
Name of Individual "On Site" Responsible for Earth Change				Company Name			
Address	City		State	Zip Code	Area Code/Phone Number		

#### 6. PERFORMANCE DEPOSIT (If required by the permitting agency)

Amount Required \$	🗆 Cash	Certified Ch	eck 🛛 Irrevo	cable Letter of Cre	dit 🛛 Surety Bond
Name of Surety Company					
Address	City	9	State	Zip Code	Area Code/Telephone Number

I (we) affirm that the above information is accurate and that I (we) will conduct the above described earth change in accordance							
with Part 91, Soil Erosion and Sedimentation Control, of the Natural Resources and Environmental Protection Act, 1994 PA 451,							
as amended, applicable local ordinances, and the d	as amended, applicable local ordinances, and the documents accompanying this application.						
Landowner's Signature Print Name Date							
Designated Agent's Signature* Print Name Date							



I, \_\_\_\_\_\_, the land owner agrees to authorize to act as my authorized agent for the submittal of the Soil Erosion & Sedimentation Control Permit application for my earth change activities. Further, I agree that modifications made to the application by the County Enforcing Agent may be approved and signed for the aforementioned authorized agent upon receipt of the Soil Erosion & Sedimentation Control Permit. I acknowledge that, as the legal landowner, lam responsible for the earth change activities occurring on my site.

Land Owner Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Email address:\_\_\_\_\_



Permit Number: \_\_\_\_\_

### **GENERAL CONDITIONS:**

In accordance with Rule 1709 promulgated under the authority of Part 91, Soll Erosion and Sedimentation Control, of the Natural Resources and Environmental Protection Act, 1994 PA 461, as amended, and in addition. to the information on the attached plan(s) and special conditions, the following general conditions apply to the earth change authorized by this permit:

- Design, construct, and complete the earth change in a manner that limits the exposed area of disturbed land for the shortest period of time.
- Remove sediment caused by accelerated soil erosion from runoff water before it leaves the site of the earth change.
- Temporary or permanent control measures shall be designed and installed to convey water around, though, or from the earth change at a non-erosive velocity.
- Install temporary soil erosion and sedimentation control measures before or upon commencement of the earth change activity and maintain the measures on a daily basis. Remove temporary soil erosion and sedimentation control measures after permanent soil erosion measures are in place and the area Is stabilized. ('Stabilized'' means the establishment of vegetation or the proper placement, grading, or converting of soil to ensure Its resistance to son erosion, sliding, or other earth movement).
- Complete permanent soil erosion control measures for the earth change within five calendar days after final grading or upon completion of the final earth change. If It Is not possible to permanently stabilize the earth change, then maintain temporary sol! erosion and sedimentation control measures until permanent soil erosion control measures are in place and the area is stabilized.

### SPECIFIC CONDITIONS: (write any specific conditions in the box listed below)



# Part 91, Soil Erosion and Sedimentation Control Plan

Minimum Requirements	Project:				
Rule 1703 Requirement	Included in Plan?*	Comments			
Map with scale: 1" = 200' or less, or indication of exact distances between noted features on site plan, including site location sketch	Yes No				
Legal description of property (town, range, section, quarter-quarter section)	Yes No				
Proximity of any proposed earth change to lakes and/or streams	Yes No				
Predominant land features	Yes No				
Slope description or contour intervals	Yes No				
Soils survey or written description of the soil types of the proposed exposed land area	Yes No				
Description and location of the physical limits of each proposed earth change	Yes No				
Description and location of all existing and proposed on-site drainage and dewatering facilities	Yes No				
Timing and sequence of each proposed earth change	Yes No				
Location and description for installing and removing all temporary SESC measures	Yes No				
Description and location of all proposed permanent SESC measures	Yes No				
Maintenance program for all permanent SESC measures and designation of person responsible for maintenance	Yes No				

\*If No is checked above, the plan must be revised to include the missing element prior to submittal/approval.

**Other Comments:** 



# APPROXIMATE PROJECT TIMING: (Month/Year)


### **MINOR PROJECTS:**

Temporary Erosion Control Measures installed
Gravel Drive/Entrance Installed
Land Cleared or Excavation Started
Final Grade/ Seeding
Permanent Erosion Measures In Place
Temporary Erosion Measures Removed

### **MAJOR PROJECTS:**

- \_\_\_\_\_ Temporary Erosion Control Measures Instilled
- \_\_\_\_\_ Gravel Drive/Entrance Installed
- \_\_\_\_\_ Land Cleared or Excavation Started
- \_\_\_\_\_ Detention/Retention/Sediment Ponds Installed
- \_\_\_\_\_ Road Construction
- \_\_\_\_\_ Utilities Installed
- \_\_\_\_\_ Final Grade/Seeding
- \_\_\_\_\_ Catch Basins/Ponds Cleaned
- \_\_\_\_\_ Permanent Erosion Measures in Place
- \_\_\_\_\_ Temporary Erosion Measures Removed

Natural Resources and Environmental Protection Act PA 451, 1994 states in Part 91, Soil erosion and Sedimentation Control that a soil erosion permit is required in the state of Michigan if: a EARTH CHANGE is within 500 feet of a lake, river or a stream and/or the EARTH CHANGE is disturbing 1 or more acres.

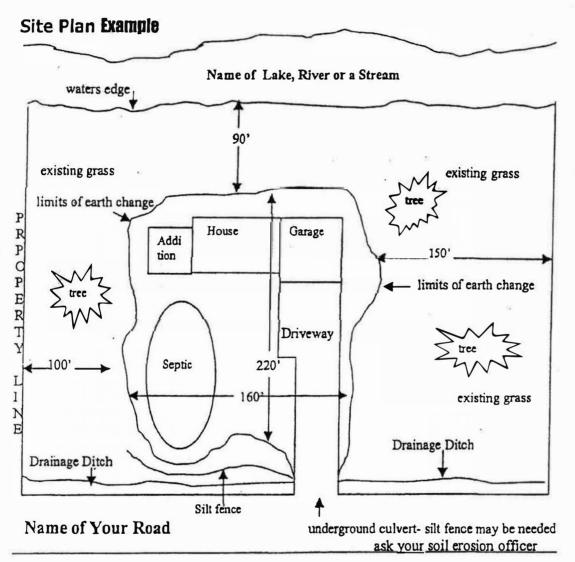

Site Plan	Please Includ	<u>e</u>
REQUIREMENTS;	a scaled map like the one above	e, structures(house, garage, shed), drainage
	characteristics, slopes, vegetate	d areas including trees and grass,
	soil type(sand, silt or clay), lim	its of proposed earth change with proximity
	to water and adjoining propert	y lines, temporary and permanent erosion
	measures when needed and est	imated timing and sequence of earth activities.
Site Plan		
timing/ sequence		
date		
Checklist; Culvert	and/or Driveway	Excavation/fill placement
Well/S	eptic installation	Building(s) construction
Buildi	ng completion	STABILIZATION of earth

# SITE SEQUENCE TABLE

Project Name/Landowner:	SESC Permit #	
Anticipated Start Date:		
Anticipated End Date:		

Construction Sequence	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Temporary SESC Measures Installed												
Silt Fence												
Rock Access Road												
Erosion Control Blankets												
Inlet protection												
Sediment Basins												
• Other:												
Strip & Stockpile												
Rough Grading												
Building Construction												
Final Grade												
Permanent SESC Measures Installed												
Sediment Basins												
Seeding/Mulch/Landscaping-Vegetation												
Pavement/Rock												
Removal of Temporary SESC Measures												

Briefly describe the maintenance plan (include responsible party) for each temporary and permanent SESC measure.

Measure	<b>Responsible Party</b>	Maintenance Plan
Silt Fence		
Buffer Strips		
Catch Basins/Inlets		
Street Sweeping		
Seeding/Mulch		
Storm Ponds/Sediment Basins		
Other:		



Silt Fence:

- Temporary sediment control measures
- Use for sheet flow, not concentrated flows
- Place adjacent to sensitive areas
- Place at or beyond base of slope
- Place on the same contour
- Trench in 6 inches
- Use multiple rows up the slope
- Use support fence if necessary
- DO NOT place in streams or ditches
- MAINTAIN remove accumulated sediment
- Remove after site is permanently stabilized

