

MEETING DATE: April 20, 2020

AGENDA ITEM: Consider Approval of Purchase of Cafeteria Serving Line at Stuard Elementary School

PRESENTER: Earl Husfeld, Chief Financial Officer and Patty Willhite, Director of Child Nutrition

BACKGROUND INFORMATION:

- Per Board Policy CH (Local), any single, budgeted purchase of goods or services that costs \$50,000 or more, regardless of whether the goods or services are competitively purchased, shall require Board approval before a transaction may take place.
- Staff in the Child Nutrition Department and Maintenance Department are recommending the replacement of the serving line/counter in the kitchen area at Stuard Elementary School.
- Due to the age of this equipment, the Maintenance Department is having extreme difficulty locating/buying replacement parts for the various equipment items (hot food wells, frost tops, etc.) comprising the serving line.
- Replacing the serving line with a new, updated line that is ergonomically efficient for students and staff is the best long-term value for the District.
- The design of the proposed serving line is based on the serving line installed at Walsh Elementary School.
- In conjunction with Lance Brooks, with Foodservice Design Professionals, the District solicited bids/quotes for this project. Three (3) responses were timely received that ranged in price from \$179,500.00 to \$180,911.00.
- After review of the bids/quotes received, and taking into consideration service and experience with this type of project, the recommendation is to accept the bid/quote received from Pasco Brokerage, Inc. in the amount \$180,911.00
- Subject to Board of Trustee approval, the new serving line will be installed during the summer.

FISCAL INFORMATION:


The cost of \$180,911.00 will be paid from available funds in Child Nutrition Fund 240.

ATTACHMENTS:


Schematic of Stuard Elementary School serving counter renovation and quote from Pasco Brokerage, Inc.

ADMINISTRATIVE RECOMMENDATION:

The Administration recommends the Board of Trustees approve the bid/quote received from Pasco Brokerage, Inc. for replacement of the cafeteria serving line at Stuard Elementary School as presented.

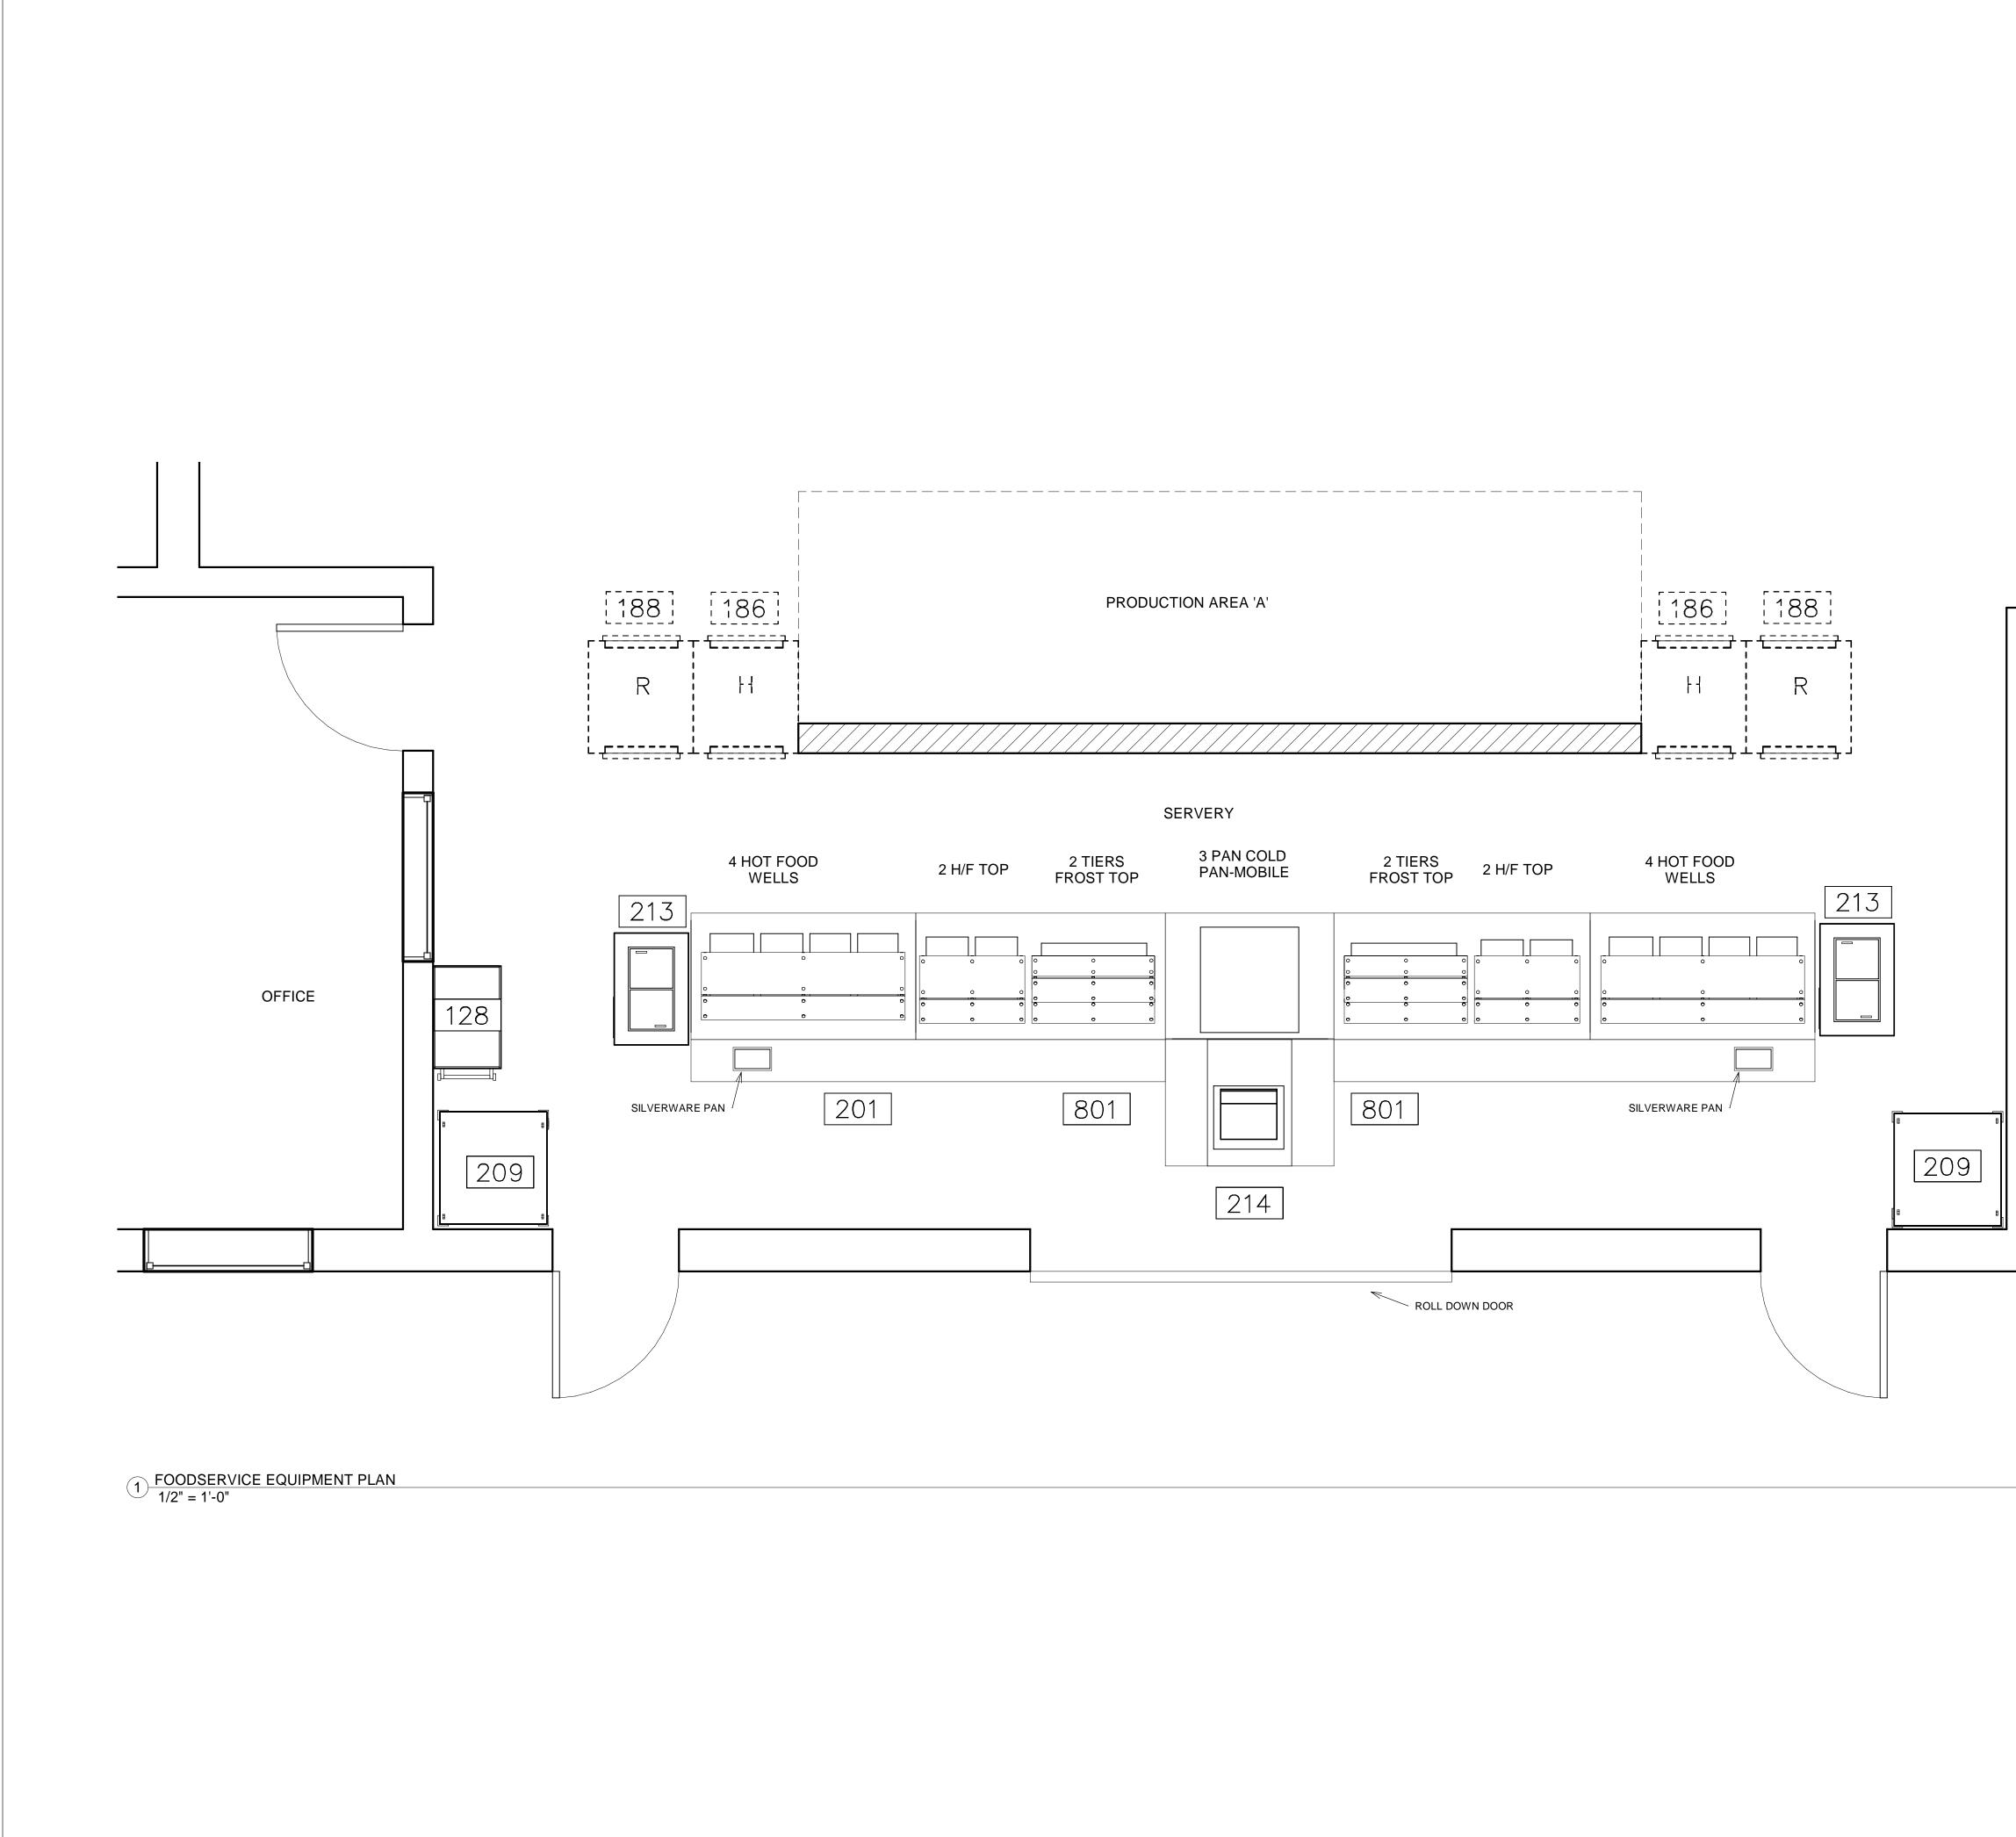

		FOODSERVICE EQUIPMENT SCHED	ULE
FDP ITEM	QTY	FDP DESCRIPTION	FDP REMARKS
128	2	UTILITY CART	
186	2	PASS-THRU HEATED CABINET- 1DR	EXISTING
188	2	PASS-THRU REFRIGERATOR - 1DR EXISTING	
201	1	SERVING COUNTER	
209	2	DROP FRONT MILK COOLER - 8 CASE	
213	2	MOBILE ICE CREAM DISPENSER	
214	1	CASH REGISTER	OWNER FURNISHED
801	2	DROP-IN ICE CREAM	

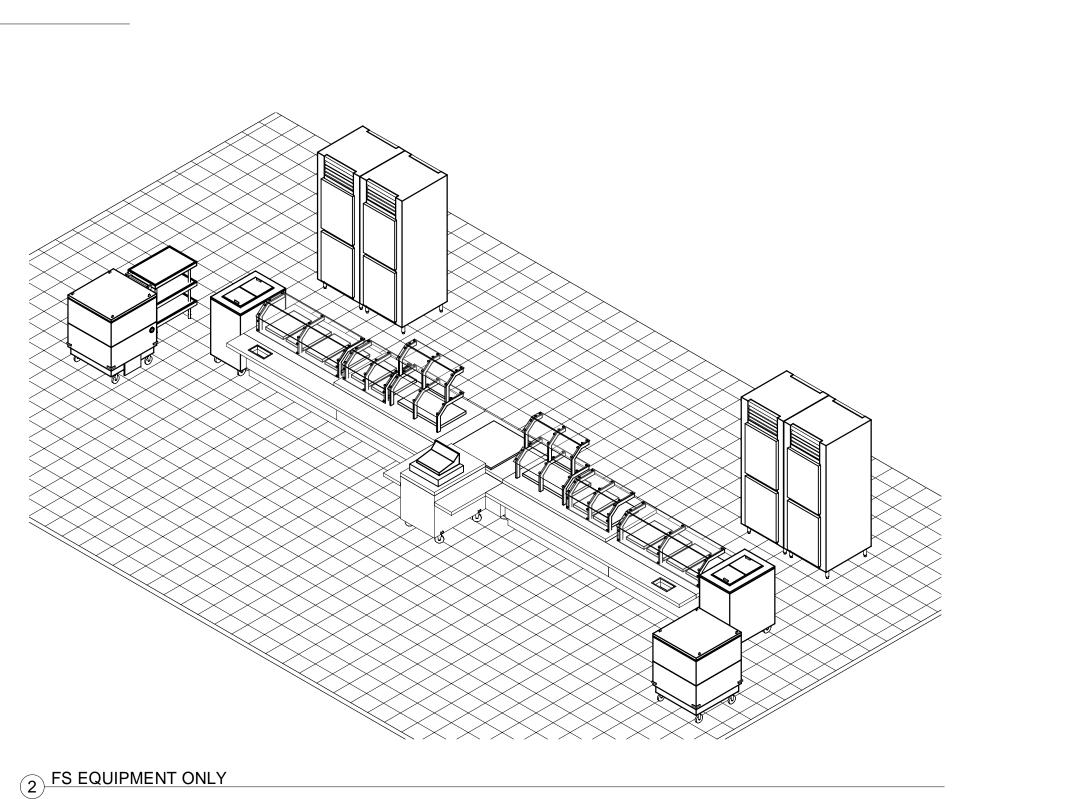

 XXXXX: FDP Project Number

 Project Name

 Project Location

 XX / XX : PM / APM

Date







То:		Project:	From:	From:			
Aledo ISD		Aledo ISD Updated Quot	e for Pasco E	Brokerage Inc			
Patty V	Willhite	Stuard Elementary Schoo	Iollon				
			6465 C	hase Oaks Blvd.			
			Plano, ⁻	TX 75023-			
			(972) 5	96-3350			
			(972)59	96-3350 (Contact)			
Custom	er ID: sd						
		ASCO's proposal is for Aledo ISDto disconnect existing serving line and nove it to Aledo ISD's designated location (warehouse, surplus yard, tc.).					
	Please see the detailed proposal by CounterCraft. After CounterCraft sets in place, levels and makes necessary filed joints, Aledo ISD will make utility connections for the CounterCraft serving counter. Pasco is a certified Texas HUB vendor, member number 063295, exp 01/22/2022.						
			er number 063295,	exp			
		Pasco is a certified Woman Owned Small Bus WOSB171585.	iness, certificate nu	mber			
Item	Qty	Description		Sell	Sell Total		
201ES	1 ea	CUSTOM ELEMENTARY SERVING COUNTER		\$180,911.00	\$180,911.00		
		CounterCraft Model No. SCOL-300		. ,	. ,		
		see attachment					
			I	TEM TOTAL:	\$180,911.00		
			Total		\$180,911.00		
	Acceptar	nce:	Date:				
	Printed I						
	Project G	irand Total: \$180,911.00					

Aledo ISD Updated Quote for Stuard Elementary School



ltem #	Qty	Price each	Price Total	Description
201	1	\$180911.	\$180911.	Serving Counter
			3	CounterCraft Model No. SCOL-300
				 Semi Closed base. Open on server side with undershelves where possible. No louvers required at front of counters. 14 gauge stainless steel top, 2" turn down at free sides. Countertop 34" high. Laminate panel counter front. Color to be selected by architect / owner. Refer to drawings. Solid surface (similar to Corian) trayslide with LED lights below. 1/4" stainless steel buttons and mounted at 32" above finished floor. Refer to drawings. One (1) built-in s/s silverware pan located in trayslide. Refer to drawings. One (1) built-in s/s silverware pan located in trayslide. Refer to drawings. One (1) lot CounterCraft adjustable series breath protector at hot food wells. Glass panels to be 3/8" tempered front and ends. Heat and LED lights as required.NSF compliant. Provide two (2) Hatco model DHWBI-4 dry well series hot food wells. Countertop at all hot food wells to be recessed to accommodate 18" X 26" sheet pan. Two (2) each CounterCraft dual-tier GOVS with One (1) single-pan Frost only she located in breath guard; rotated 90 degrees. LED lights and Dekton inserts on both tiers. NSF compliant. One (1) lot CounterCraft fixed dual-sided series breath protector at cold pan. Glass panels to be 3/8" tempered front and ends. LED lights as required.NSF compliant. One (1) lot CounterCraft fixed dual-sided series breath protector at cold pan. Glass panels to be 3/8" tempered front and ends. LED lights as required.NSF compliant. One (1) lot CounterCraft fixed dual-sided series breath protector at cold pan. Glass panels to be 3/8" tempered front and ends. LED lights as required.NSF compliant. One (1) lot Bon Cheft tiles at hot, hot/cold and cold only food wells. Color to be selected by architect. One (1) lot Bon Cheft tiles at hot, hot/cold and cold only food wells. Color to be selected by architect. One (1) lot Bon Cheft tiles at hot, hot/cold and cold only food we
•	1	-	INCLUDED	- 18 gauge stainless steel kick plate. CounterCraft Delivery and Onsite Assembly
				NOTICE: CounterCraft pricing INCLUDES delivery and assembly. CounterCraft will deliver the quoted counter(s), uncrate, bring inside building, set in place, complete all field welds and joints, complete all final assembly, and level
			1	This includes one (1) CounterCraft site visit for dimensioning and field coordination If additional trips are required, additional charges may be incurred. Please request a quote.
				Final utility (plumbing / electrical) connections not by CounterCraft. Removal and disposal of existing equipment is not included.