
Meeting Date:
Meeting Type:

LOVE & INSPIRE




Full wap sample
- carwapcity.

- under carraige storage both sides - windows will have black trim.

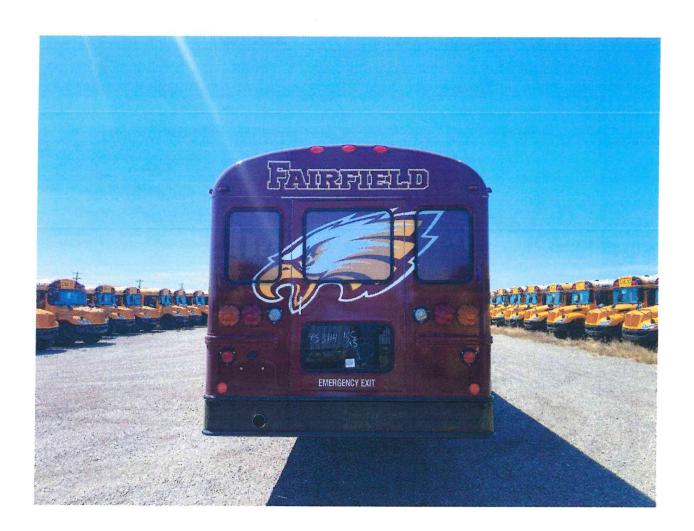



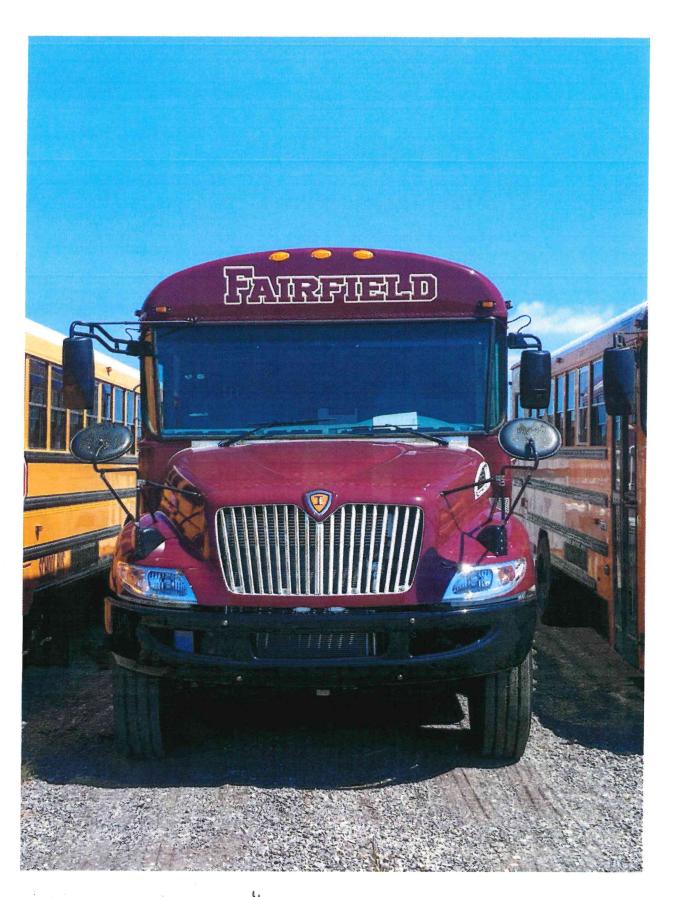

- Black anlle



Seat Sample
-Seats will be black.
- 40 Passangers



CE SCHOOL BUS

Sales Proposal For:

Marble Falls ISD

Presented By:

LONGHORN BUS SALES

Prepared For:

Marble Falls ISD
DIRECTOR OF TRANSPORTATION

2001 Broadway St.

Marble Falls, TX 78654-4803

(830)693 - 4357

Reference ID: 1 40P DSLFRMN3P

Presented By: LONGHORN BUS SALES FRED HOKE 5665 SE LOOP 410 SAN ANTONIO TX 782223903 713-631-9306

Model Profile 2027 CE SCHOOL BUS (PB110)

AXLE CONFIG:

4X2

APPLICATION:

Activity Trip

MISSION:

Requested GVWR: 31000. Calc. GVWR: 31000

Calc. Start / Grade Ability: 23.14% / 1.50% @ 55 MPH

Calc. Geared Speed: 87.7 MPH

DIMENSION:

Wheelbase: 276.00, CA: N/A, Axle to Frame: 148.00

ENGINE, DIESEL:

{Cummins B6.7 240} EPA 2024, 240HP @ 2400 RPM, 600 lb-ft Torque @ 1600 RPM, 2600 RPM

Governed Speed, 240 Peak HP (Max), School Bus Only

TRANSMISSION, AUTOMATIC:

{Allison 2500 PTS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, Less

PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max, School Bus

CLUTCH:

Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING:

{Meritor MFS-10-122A} I-Beam Type, 10,000-lb Capacity

AXLE, REAR, SINGLE:

{Dana Spicer S140} Single Reduction, 21,000-lb Capacity, 190 Wheel Ends Gear Ratio: 5.57

TIRE, FRONT: TIRE, REAR: (2) 11R22.5 Load Range H AH37 (HANKOOK), 499 rev/mile, 75 MPH, All-Position (4) 11R22.5 Load Range H AH37 (HANKOOK), 499 rev/mile, 75 MPH, All-Position

SUSPENSION, REAR, AIR, SINGLE:

{International IROS} 23,000-lb Capacity, 9.25" Ride Height, with Shock Absorbers Mounted

Outside the Rails

PAINT:

Cab schematic 100NB

Location 1: 9219, Winter White (Std)

Chassis schematic N/A

<u>Code</u> PB11000	<u>Description</u> Base Chassis, Model CE SCHOOL BUS with 276.00 Wheelbase, N/A CA, and 148.00 Axle to Frame.
	Bus Body Plan, AABU0000KL
	Seat Capacity, 0
DODY DI ANS	
BODY PLANS 47AGJ	BODY, BUS Conventional; 78" Headroom, 33'5" Body Length, +9 Section Front and Rear, 77 Passenger, 276
47AG3	WB
49UBZ	STATE OF OPERATION Texas
51ZZZ	BODY PLAN, NON-SPECIAL NEEDS for Bus Body Configurator, OMIT Body Plan.
OBD001	BODY PLAN, APPROVED VARIATION 0049999 : BUS BODY PLAN, Placement Incomplete
AXLE CONFIGURAT	TION
1ANA	AXLE CONFIGURATION 4x2
ENGINE	
12EYG	ENGINE, DIESEL {Cummins B6.7 240} EPA 2024, 240HP @ 2400 RPM, 600 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 240 Peak HP (Max), School Bus Only
12VKM	EMISSION, CALENDAR YEAR {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2026
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
	Notes : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.
12XCC	RADIATOR Aluminum, 2-Row, Down Flow, Front to Back System, 640 Sqln Louvered, with 383 Sqln Charge Air Cooler, Includes In-Tank Oil Cooler
	Includes : RADIATOR HOSES Premium, Rubber
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On
	Includes : FAN Nylon
12VCE	AIR CLEANER Single Element, Fire Retardant Media
12702	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection, Nitrite Free
12VVN	CRUISE CONTROL Electronic
12WPV	OIL PAN 15 Quart Capacity, For Cummins ISB/B6.7 Engines
12UGN	THROTTLE, HAND CONTROL Electronic
TRANSMISSION	

3

<u>Code</u> <u>Description</u>

13BBP TRANSMISSION, AUTOMATIC {Allison 2500 PTS} 6th Generation Controls, Wide Ratio, 6-Speed with Double

Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max, School Bus

13WVW NEUTRAL AT STOP OMIT

13WYY SHIFT CONTROL PARAMETERS (Allison) 1000 or 2000 Series Transmissions, Performance Programming

13WLN TRANSMISSION OIL Synthetic; 20 thru 28 Pints

13WEX TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, for Allison 1000 & 2000 Series

Transmission

CLUTCH

11001 CLUTCH Omit Item (Clutch & Control)

REAR AXLES, SUSPENSIONS

14AKC AXLE, REAR, SINGLE {Dana Spicer S140} Single Reduction, 21,000-lb Capacity, 190 Wheel Ends . Gear

Ratio: 5.57

14TEB SUSPENSION, REAR, AIR, SINGLE {International IROS} 23,000-lb Capacity, 9.25" Ride Height, with Shock

Absorbers Mounted Outside the Rails

FRONT AXLES

2ASH AXLE, FRONT NON-DRIVING {Meritor MFS-10-122A} I-Beam Type, 10,000-lb Capacity

FRONT SUSPENSIONS

3ADB SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 10,000-lb Capacity, with Shock

Absorbers

Includes

: SPRING PINS Rubber Bushings, Maintenance-Free

CABS, COWLS, BODIES

16010 COWL Flat Back

16BAM AIR CONDITIONER with Integral Heater and Defroster

16VKB CAB INTERIOR TRIM Classic, for Day Cab

16XCW CAB, INTERIOR TRIM, CLOSEOUT Under IP, Driver Side

16GEG GAUGE CLUSTER Premium Level; English with English Electronic Speedometer

Includes

: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip

Hours, MPG, Distance to Empty/Refill for

: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure

Gauge, Primary and Secondary Air Pressure or Auxiliary Air Pressure (if Air Equipped)

: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage

(Visual and Audible), Low Air Pressure, Primary and Secondary (if Air Equipped)

4

16HLJ GAUGE, DEF FLUID LEVEL

16563 HEATER SHUT-OFF VALVES (2) Ball Valve Type

16XJP INSTRUMENT PANEL Wing Panel

<u>Code</u> 16HKT	<u>Description</u> IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	
16VVJ	WINDSHIELD Three Piece, Bonded, with Shaded Band	
FRAMES		
1CAC	FRAME RAILS High Strength Low Alloy Steel (50,000 PSI Yield); 10.125" x 3.062" x 0.312" (257.2mm x 77.8mm x 8.0mm); 489.2" (12425mm) Maximum OAL	
1LSG	BUMPER, FRONT Contoured, Steel, Painted Gloss Black, Severe Duty	
	Notes : Bumper Thickness is ,25"	
1LNT	CROSSING GATE, FRONT Omit Item	
1SAL	CROSSMEMBER, REAR, AF (1)	
1LEG	LICENSE PLATE HOLDER Includes Upper & Lower Mounting Plate Hardware, Mounted in Existing Holes in Front Bumper	
1WJE	WHEELBASE RANGE 276" (700cm) Only	
BRAKES		
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	
	Includes : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6	
4AZS	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Electronic Stability Program, with Automatic Traction Control	
4GBL	BRAKE, PARKING (Bendix Intellipark) Electronic Park Brake, for Truck or Bus Applications	
4XDC	BRAKES, FRONT {Meritor 15X4 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 15" X 4", 13,200-lb Capacity	
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 Sqln	
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	
4EDN	AIR DRYER {Bendix AD-9SI} with Heater, Includes Safety Valve	
4VLE	AIR DRYER LOCATION Mounted Inside Engine Compartment, Right Side	
4VLY	AIR TANK LOCATION (1) Mounted Inside & Below Left Rail, Back of Cab	
4722	DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank	
4WZT	GVWR LIMITATION FOR BUS with Air Brakes, Limited to 33,000-lbs Maximum to meet FMVSS 121 Requirements, for Conventional Bus	

5

Code

Description

4WJP

PARKING BRAKE INTERLOCK with Electronic Park Brake, Parking Brake Cannot be Released Until Ignition

Switch is in "On" Position and Service Brake Pedal is Applied, Use with Air Brake Chassis Only

STEERING

5PRR

STEERING GEAR (TRW TAS66) Power

5708

STEERING COLUMN Tilting

5CAW

STEERING WHEEL 4-Spoke; 18" Dia., Black

DRIVELINES

6DGA

DRIVELINE SYSTEM (Dana Spicer) SPL100, for 4x2/6x2

6901

PROPSHAFT GUARD

EXHAUST SYSTEMS

7BMK

EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail, for Single Long

Horizontal Tail Pipe

7WBL

TAIL PIPE (1) Horizontal, Long, Exits Left Side Through Bumper

ELECTRICAL SYSTEMS

8000

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

Includes

: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: MISCELLANEOUS FEATURES Modular, Loom Protected, Grommets in all Applicable Body Openings, Assembled in Computer Assisted Fixture which Verifies Continuity and Correct Assembly Prior to Installation

: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: STARTER SWITCH Electric, Key Operated

: TURN SIGNAL SWITCH Self-Cancelling with Lane Change Feature

: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush

Mounted

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with

Turn Signal Lever

: WIRING, CHASSIS Color Coded and Continuously Numbered

8GXN ALTERNATOR {Leece-Neville BLP4024N} Brushless, 12 Volt, 325 Amp Capacity, Pad Mount, with Remote

Sense

8RPP ANTENNA Shark Fin. Roof Mounted

BATTERY BOX Steel, with Sliding Tray, 25.25" Wide, for Standard Batteries, 1-3 Battery Capacity, Mounted 8TTK

Left Side Behind Front Axle Perpendicular to Frame Rail

BATTERY SYSTEM (Fleetrite) Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud 8MSG

8XDX BK WARN IND, PARK BK NOT SET Visual and Audible Alarm, Active Upon Ignition Off and Parking Brake Not

Set, Reminder to Set Parking Brake

HAX8 CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

8TUT **COLLISION MITIGATION SYSTEM Omit**

8WXB HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position

8XKC HEADLIGHTS Halogen, with Daytime Running Lights, Automatic Twilight Controlled

October 31, 2025

Vehicle Specifications 2027 CE SCHOOL BUS (PB110)

Code Description 8WRB HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On 8540 HORN, ELECTRIC (2) Trumpet Style 8WWJ INDICATOR, LOW COOLANT LEVEL with Audible Alarm 8RRC RADIO AM/FM/USB Input/Auxiliary Input, Includes Wiring and Antenna, with Public Address System 8XKL STARTING MOTOR (Mitsubishi Electric Automotive America 90P47) 12-Volt, with Soft-Start **FRONT END** 9WBW FRONT END Tilting, Fiberglass, with Three Piece Construction, Dual Air Intakes 9HCW **GRILLE Molded in Black** 9WAB HOOD TILT ASSIST {EASY TILT} Mechanical 9AAB LOGOS EXTERIOR Model Badges 9AAE LOGOS EXTERIOR, ENGINE Badges SPEEDOMETER, TOOLS, MISC 10020 CHASSIS PAINT Full Chassis 10AGB CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan 10WTU MULTI FUNCTIONAL BUS ID To be Used for Multi Functional School Activity Bus, Non Route Use Only, Letter of Compliance from End User is Required 10060 PAINT SCHEMATIC, PT-1 Single Color, Design 100 Includes : PAINT SCHEMATIC ID LETTERS "NB" 10788 PAINT TYPE Urethane, One or Two Colors, Other than Imron or International. PROMOTIONAL PACKAGE 7 Year Unlimited Miles/km Warranty, Limited Time Program for Allison 2500 10XAK Series Transmission on School and Commercial Buses (Supplied directly through Allison) 10AHZ ENTRANCE DR COVERAGE CREDIT Bus Entrance Door Service Contract Coverage Credit 10WLE SPECIAL ROUTING CONTROL SEATS To CBC for Seats **FUEL TANKS** FUEL TANK Top Draw, Steel, Rectangular, 100 US Gal (379L), Includes Protective Cage, Mounted Between 15SLL Frame Rails and Behind Rear Axle 15WEP DEF TANK 16.5 US Gal (62.5L) Capacity, Frame Mounted Outside Right Rail, Behind 0 Bow FUEL/WATER SEPARATOR {Racor 400 Series,} 12 VDC Electric Heater, Includes Pre-Heater, with Primer 15LMN Pump, Includes Water-in-Fuel Sensor 15LRE LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle WHEELS, TIRES - FRONT **27DUW** WHEELS, FRONT (Accuride 51408) DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs 7382135809 (2) TIRE, FRONT 11R22.5 Load Range H AH37 (HANKOOK), 499 rev/mile, 75 MPH, All-Position

7

Code WHEELS, TIRES - REA	Description R	
28DUW	WHEELS, REAR {Accuride 51408} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	
7382135809	(4) TIRE, REAR 11R22.5 Load Range H AH37 (HANKOOK), 499 rev/mile, 75 MPH, All-Position	
BODY FEATURES		
47BAK	BUMPER, REAR Painted, 12" High, 3/16" Thick	
47BAR	SUPPORTS, REAR BUMPER Bolted to Frame	
47AYB	BODY, REAR Includes Emergency Door	
47ARH	BOWS, ROOF 14 ga., One Piece Construction	
	<u>Includes</u> : BOWS, ROOF Positioned Floor Line to Floor Line, Threaded Through Roof Strainers and Drip Rail	
47BLU	FASTENERS, EXTERIOR MOUNTED Stainless Steel Screws; for All Exterior Body Lights, Body Exterior Rear View Mirrors, Bumper Mounted Crossing Gate and Body Mounted Stop Arms	
47APX	FASTENERS, HEADLINER Screws	
47AZL	FLOOR, BODY with Wheel Wells	
47PBZ	HANDLE, ASSIST Windshield Side Mounted, Left and Right, Body Color	
47APR	HEADLINER, BODY Conventional; 25'11"-35'08" Body Length, Perforated Full Length with Sound Insulation Full Length	
47ARP	LIGHT BARS Plastic	
47BBH	LINING, SIDE INTERIOR, LOWER Embossed Steel, Clear Coated	
47MBN	ROOF CAPS Smooth Front & Rear, for Commercial Bus & Activity Bus	
47AVH	RUB RAILS, BODY (3) 16ga., Steel	
	Includes : RUB RAILS Full Length, Primer Coated (Both Sides), Attached to Body without Cuts or Splices	
47BBZ	SEALER Extra; Sidewall to Floor, In Wheel Pocket Area, and Rear Wall to Floor	
47AZE	SIDE SHEET, BODY, EXTERIOR Conventional, 16ga., Smooth, 31'2", 31'11", 32'8", 33'5", 34'2", 34'11", 35'8" Body Lengths	
47ASG	SKIRT, BODY for Conventional, 14 1/2", 16ga	
	Includes : SKIRT, BODY Extra Smooth Steel Supported by Floor Gussets	
47BLD	STEP, FRONT ENTRANCE DOOR 27 1/4" Depth; 14ga Steel, Formed Treads, Naviflex Finish	
47AUR	TIE DOWNS, BODY Grade 8 Bolts, Every Body Section	
	Includes : TIE DOWNS, BODY with Formed Tab that Fits into Floor Structure to Prevent Turning	
47DAJ	COVER, REAR DOOR INSIDE HANDLE Partial Coverage	
47PCW	DOOR, ENTRANCE, FRONT Electric, Outward Opening, with Single Pane Glass	
47DAK	FASTENERS, REAR DOOR Bolts and Nutserts, Rear Door To Body	
47DDE	HANDLE, ASSIST, ENTRANCE DOOR Outside Entrance	

8

Code	Description	
47NLS	HANDLE, EXTERIOR, REAR Emergency Door; White	
47DDH	HOLD BACK, REAR DOOR Stationary, No Cables, with Plastic Cover	
47DDU	LATCH, REAR DOOR One Point Slide Bar, Cam Operated, with One Inch Stroke	
47EYL	LOCK, ENTRANCE DOOR in External Release, with Key	
47DEK	LOCK, REAR DOOR with Ignition Starter Interlock	
47BDJ	COMPARTMENT, DRIVER STORAGE Bin, Sized to Hold Three Ring Binder, Includes (1) USB-A Port and (1) USB-C Port	
47EVY	COMPARTMENT, LUGGAGE, LT MID 114" x 24" x 22"	
	Includes : HINGES Rubber : LATCH, T-HANDLE, LOCKING Stainless Steel	
47EWA	COMPARTMENT, LUGGAGE, RT MID 114" X 24" X 22"	
47EBM	HOLD DOWN, BATTERY For Up To 3 Batteries	
47EMV	LUGGAGE RACK, INTERIOR Tubular, Below Light Bar, 22 Bow	
47LAU	INSULATION,ROOF/SIDES/BULKHEAD 1.5"	
47LAT	NOISE REDUCTION, ROOF BOW Conventional; Insulation, 31'2", 31'11", 32'8", 33'5", 34'2", 34'11", 35'8" Body Lengths	
47MBA	UNDERCOAT, BODY Fire Resistant, Water Based, TT-C-730 Spec	
	Includes : UNDERCOATING Performed Before and After Mounting on Chassis	
47SPB	ALPHA/NUMERIC DECAL GUIDE Quantity 021-30	
47AJB	BODY CERTIFICATION TAG Mylar Label	
47AJC	BODY TAG, METAL Capacity to Include the Total Number of Passengers	
47PLX	LETTERS, DEF, I.D. Decal; "DEF ONLY", 1" Black, on DEF Filler Door	
47MJR	LETTERS, DOOR, REAR Decals; "EMERGENCY DOOR", 2" Black Letters Inside and Outside	
47NGP	LETTERS, FUEL I.D. Paint; "DIESEL FUEL", 2" Black, Adjacent to Fuel Filler Door	
47MVA	LETTERS, HEADER Decal; "WATCH YOUR STEP", 1" Black, Above Windshield	
47MRU	LETTERS, E/E WINDOW, LEFT (2) Decal Sets, "EMERGENCY EXIT", Black Inside and Outside	
47NHL	LETTERS, E/E WINDOW, RIGHT (2) Decal Sets, "EMERGENCY EXIT", Black, Inside and Outside	
47MZB	LETTERS, SCHOOL BUS FRONT/REAR Decal; OMIT "SCHOOL BUS"; with 8" Black Letters; on Front and Rear Cap	
47MVC	LETTERS, STEPWELL Decal, "WATCH YOUR STEP", 2.5" Black, Behind Door on Step Riser	
47NTE	LOGO, ROOF LINE Decal; Wing and Shield, First Body Section, Above Driver Window and Entrance Door Over Driver Window and Entrance Door	
47NMG	OPERATING INSTRUCTIONS, REAR Decal, Inside Rear Emergency Door	
47NKM	PAINT COLOR, BODY INTERIOR 9384 Spring White	
47NJB	PAINT COLOR, BODY EXTERIOR 9219 Winter White	
47NJS	PAINT COLOR, BUMPER Rear, 0001 Canyon Black	

9

<u>Code</u> 47NXU	<u>Description</u> PAINT FLASHER BACKGRD To Match Body Color
47NGR	PAINT HOOD AND FENDER 9219 Winter White
47NKL	PAINT, RUB RAIL Flange to Flange
47NAA	PAINT COLOR, RUB RAILS 9219 Winter White
47NGW	SEAL, RUB RAILS Top Edge, All Rails
47MUR	STRIPING, E/E WINDOW, LEFT (02) Perimeter, 1" White
47MXB	STRIPING, E/E WINDOW, RIGHT (02) Perimeter, 1" White
47MSC	STRIPING, PERIMETER, REAR Emergency Door, 1" White Reflective
47KBN	STRIPING, ROOF HATCH, FRONT (3M) Decal, Perimeter, 1" White Fluorescent Diamond Grade
47KBP	STRIPING, ROOF HATCH, REAR {3M} Decal, Perimeter, 1" White Fluorescent Diamond Grade
47MTY	WIRING DIAGRAM Schematic, Electrical
	Includes : ACCESS PANEL for Wiring Diagram Schematic Located on Inside of Electrical Panel Door, Below Driver Window
47SBS	SUB FLOOR, PLYWOOD Conventional; B-C Exterior Grade, Less Sealed Edges, 5/8", 5 Ply, for 31'2",31'11", 32'8",33'5", 34'2", 34'11", 35'8" Body Lengths
47MZA	MONITOR, POST TRIP INSPECTION Omit
47DRN	SWITCH, LOCATION Left of Driver; Includes 2 Position Door Control
BODY FEATURES	
48ANT	WINDOW, DRIVER Laminated, Clear

48ANT	WINDOW, DRIVER Laminated, Clear	
48BJA	COLOR, WINDOW FRAME, PASS Passenger Window, Natural Aluminum Finish	
48BAH	WINDOW, E/E, LEFT (2) Vertical Hinge	
48BKP	WINDOW, E/E, RIGHT (2) Vertical Hinge	
48AUN	WINDOW, PASSENGER, TINT Conventional; 28% LIght, Laminated Glass, 78" Headroom, with 31'2", 31'11", 32'8", 33'5", 34'2", 34'11", 35'8" Body Lengths	
48ARP	WINDOW, SASH (16) 27" Sections, 9"x 23" Opening	
48AST	WINDOW, SASH +9 SECTIONS (4) 9" x 32 1/4" Opening	
48APL	WINDOW, STOPS 12" Opening, Only with 78" Headroom	
48PAY	AISLE POSITION Center, for balanced seating	
48PBB	FLOOR COVERING, COLOR Black	
48PJR	FLOOR COVERING, TRIM Aluminum	
48PJZ	FLOOR COVERING, TYPE {Koroseal} All Body Lengths	
48VVR	STEP TREADS (Koroseal) Pebble White Nosing Only, with Non-Metal Backing, used with Formed Treaded Steps	
48PAV	WHEEL POCKET COVER Plastic, ABS	
48PKC	HOSE CLAMPS, HEATER HOSE Constant Torque for Heater System	
48PKR	FAN, DEFOG LEFT CENTER 6.50" Diameter, Black, Mounted Left of Center Post, 2-Speed Switch in Panel	

10

<u>Code</u> <u>Description</u>

48PMC HEATER, PASS, LT MIDSHIP 1ST 50,000 BTU

Includes : AIR FILTER

48PMH HEATER, PASS, LT REAR 50,000 BTU

Includes : AIR FILTER

48PNW HEATER, WATER PUMP {2 MPU 12} Self Priming, with Plastic Housing

48UZN ROOF HATCH, FRONT {Specialty Hybrid Adv H1975-025-191-0F} Emergency Exit with Outside Release,

Alarm, English Decals

48UZT ROOF HATCH, REAR {Specialty Hybrid Adv H1975-025-191-0F} Emergency Exit with Outside Release,

Alarm, English Decals

48PPS ROOF VENT, FRONT Static

48UXM ARM REST, DRIVER Left and Right

48GJH SEAT, DRIVER {National 2000} Air Suspension Dual Shock, High Back with Integral Headrest, Heated,

Isolated, with 2 Position Front Cushion Adjustment, 6 to 17 Degree Seat Back Adjustment, Mechanical Lumbar

Support, Includes Additional Back Padding

Includes

: SEAT BELT, DRIVER Adjustable D-Loop Seat Belt, Single Locking Retractor

48PXP UPHOLSTERY, BARRIER, TYPE (1-2) Prevaill, 42 oz.

48UXN UPHOLSTERY, DRIVER SEAT, COLOR Drivers Seat, Graphite
48PVA UPHOLSTERY, DRIVER SEAT, STYLE Plain, with Cloth Insert

48PWR UPHOLSTERY, DRIVER SEAT, TYPE Prevaill, 42 oz.
48BDP BARRIER, CRASH, AFT ENTRY DOOR 36", 2 Leg

48RAJ BARRIER, CRASH, AFT DRIVER 36", 1 Leg

48DPL HAND RAIL, ENTRANCE DOOR, AFT 1" Dia, Stainless Steel
48DPR HAND RAIL, ENTRANCE DOOR, FWD 1" Dia, Stainless Steel
48REP PANEL, MODESTY, AFT OF DRIVER Mounted Under Barrier

48ACN SEAT BELT, DRIVER, COLOR with Blaze Orange Seat Belt Webbing

48USV SEAT BACK, PASSENGER High Back

48PWE UPHOLSTERY, PASS SEATS, COLOR Black, for Seats, Barriers and Head Bumpers

11

48PHM UPHOLSTERY, PASS SEATS, TYPE Prevaill, 42 oz.; for (19-20) Seats

48RLX CUSHION, SEAT 15" Depth

48RRA UPHOLSTERY, SEAT, STITCHING Single

BODY FEATURES

48HAC WINDOW, ENTRANCE DOOR Laminated, Clear, with Single Piece Glass

49AMJ ALARM, BACKING {Ecco #575} 107 dB

49AMT CIRCUIT, PROTECTION Breakers, Manual Reset in Lieu of Fuses

<u>Code</u> 49BGJ	<u>Description</u> FLASHER SYSTEM Omit; To be Used for Multi Functional School Activity Bus or Commercial Models Only, Non Route Use
49JBU	LIGHT, ENTRY DOOR {Sound Off/OptiLuxx} LED; 4" Oval; Light Mounted in Skirt Behind Entrance Door, Wired To Step Light
49BCR	LIGHT, EXTERIOR, CHECK Automatically Activates Lights for Pre Trip Inspection
49CKB	LIGHT, INDIC, WARNING LIGHTS OMIT, To be Used for Multi Functional School Activity Bus, Non Route Use Only
49JBV	LIGHT, LICENSE PLATE (Sound Off/OptiLuxx) LED, with Mounting Gasket
49JBW	LIGHT, STEP {Sound Off/OptiLuxx} 4" Round LED, White, Wired to Clearance Lights, Operated by Entrance Door
49ZNC	LIGHTS, BACK UP (2) {Sound Off/OptiLuxx} 4" Round, White, LED, with Flange
49JBS	LIGHTS, CLUSTER (Sound Off/OptiLuxx) Oval, 4 Internal LEDs per Light; Amber Front and Red Rear
49BYZ	LIGHTS, DIRECTIONAL, REAR (2) {Sound Off/OptiLuxx} LED, 7" Round Amber
49PTB	LIGHTS, DIRECTIONAL, SIDE {Sound Off/OptiLuxx} Rectangular LED Armor Type, Amber, 1 Each Side, Second Bow Section Aft of Entrance Door Between 2nd & 3rd Rub Rail
49JEJ	LIGHTS, DOME LED, Rectangular Recessed Type, Two Full Rows, for 29'08", 30'05", 31'02", 31'11", 32'08", 33'05" Body Lengths
49EYG	LIGHTS, DOME, DRIVER (1) LED, Rectangular, Mounted 32.94" Left of Center in Ceiling, with Separate Switch
49JED	LIGHTS, MARKER, FRONT & REAR LED, Flush Mount, Amber Front and Red Rear
49ZNN	LIGHTS, MARKER, SIDE, INTERMED LED, Amber, Flush Mount, Intermediate, Centered, Required for Units 30 Foot or Longer
49BYT	LIGHTS, STOP (2) {Sound Off/OptiLuxx} and Tail; 7" Round LED, Red
49ZNG	LIGHTS, STOP & TAIL ADDITIONAL (2) {Sound Off/OptiLuxx} 4" Round LED, Red, with Flange
49BGH	LIGHTS, WARNING Omit All; To be Used for Multi Functional School Activity Bus, Non Route Use Only
49AWV	SPEAKERS AND WIRING (8) Flush Mounted In Light Bar
49AJY	STOP ARM, FRONT Omit
49BSL	SWITCH, DOME LIGHTS, DIMMER for All Passenger Dome Lights
49AMY	SWITCH, REAR DOOR BUZZER for Emergency Door
49BTR	WIRING MOD, DOME LIGHTS Mounted in Ceiling
49EGL	MIRROR, CROSS VIEW, EXTERIOR (2) {Rosco Mini Hawk-Eye} Black
	Includes : MIRROR MOUNT Attached to Body with Metal Backing Plates
49EGB	MIRROR, INSIDE 10" x 30", Clear
49EXG	MIRROR, REAR VIEW, EXTERIOR {Rosco Open-View} Black, Motorized Head, Heated, Detent Breakaway Brackets
49ENK	VISOR, INTERIOR, LEFT FRONT 6" x 30", Transparent, For Left Windshield
49GDS	COMPARTMENT ABOVE DRIVER Left of the Driver
	Includes : COMPARTMENT ABOVE DRIVER Compartment Size: 39" x 10" x 10" : HINGES Piano Type

Proposal: 11665-01

: HINGES Piano Type

<u>Code</u> 49JGJ	<u>Description</u> FIRE EXTINGUISHER 5 lb 3A-40BC Minimum, with Flexible Hose and Metal Nozzle
49JGN	FIRE EXTINGUISHER, FRONT LOC Located Behind Driver Seat
49JGW	KIT, BODY FLUID National Standard, Poly White Box
49EUB	KIT, FIRST AID Metal; 24 Unit, Spec State
49MZX	LATCH, COMPARTMENT Non Locking, for Overhead Storage Compartment
49JEY	LOCATION, BODY FLUID KIT on Bulkhead
49GCH	LOCATION, FIRST AID KIT Right Side Front Bulkhead with Screws
49GCP	PADDING COMPART ABOVE DRIVER Window; Safety Equipment Compartment, without Dome Light
49GLP	REFLECTORS, REAR (2) 3", Red, Mounted with Screws
49GLM	REFLECTORS, SIDE, FRONT (2) 3", Amber; 1 Aft Drivers Window Left, 1 Aft Entrance Door Right, Mounted with Screws
49GLA	REFLECTORS, SIDE, INTERMEDIATE (2) 3" Amber, 1 Each Side, Mounted with Screws, Below The Third Rub Rail From the Top
49GLG	REFLECTORS, SIDE, REAR (2) 3", Red, Mounted with Screws
49GED	SAFETY TRIANGLES Warning Reflectors, Mounted on Floor Between Driver Seat and Drivers Crash Barrier/ Stanchion/Partition
49GUB	CUTTER, SEAT BELT {TIE TECH Safecut} for Cutting Seat Belts
49JGE	CUTTER, SEAT BELT, LOCATION Mounted on Panel Left of Driver
49JAC	DEF FILLER DOOR with Non-Locking Latch
49MZS	FUEL FILLER DOOR Non-Locking, Lever Latch, Spring Loaded to Hold in Open Position
49CKT	FUEL FILLER PIPE Low Profile Neck Cap and Vent Hosing, for Use with Right Side Fill for Between the Rail Fuel Tanks, for Above the Floor Fuel Fill, for 25 GPM Fill Rate Only
49GUM	INSPECTION PLATE Fuel Sending Unit 8" x 8" Steel
49GVC	MUD FLAPS, REAR WHEELS (2) Rubber
49MUC	SIGN, DESTINATION, FRONT Omit
49MUD	SIGN, DESTINATION, REAR Omit
OBD002 ∦	MISCELLANEOUS Bus Body Plan: SQ for black upholstery on Freedman seats was denied. Quote was obtained for the seats and upholstery. The BBC has a "seat installer" selection for CBC installed seats. Once that is selected, it removes the seat codes (by the way, I got
	Services Section:
WARRANTY	

WAINANTI	
40126	WARRANTY Standard for CE, RE, BE School Bus Models, Effective with Vehicles Built March 1, 2017 or Later, CTS-3304H
40YET	SERVICES, TOWING Service Call to 24-Month/Unlimited Mileage to the Nearest IC Bus Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$1100 (USA) Maximum Benefit per Incident
40CYY	SRV CONTRACT, ENTRANCE DOOR 3 Year/Unlimited Miles, Entrance Door Policy

Code 40YGC **Description**

SRV CONTRACT, EXT VEH COVERAGE To 24-Month/50,000 Miles (80,000 km), Covers 100% Parts and Labor; Includes Body; Excludes Extending Warranty for Engine, Transmission, Perforation or Corrosion of Cab/

Cowl Structure and Paint

BODY FEATURES

49GVN

WARRANTY 5-Year, Limited

40YGC Warranty: Longhorn Bus will cover the warranty for 2 yrs./unlimited mileage. (International will cover the first 50K miles.

Longhorn Bus will cover 50K+ miles, up to the ending of the two-year term, per current Texas School Bus Specifications.)

49GVN 5-Year Limited warranty is an International warranty only. It does not apply to any aftermarket parts listed herein.

AC - 136KBTU BERGSTROM - FRONT & REAR INWALL W/MID EVAPS (FACTORY INSTALLED DASH AC) LHB INSTALL

DOT INSPECTION

PRE DELIVERY INSPECTION CE MODEL

WEIGHT SLIP

SET GOVERNOR SPEED 75 MPH

BACKUP CAMERA IN MIRROR 10X30 LHB INSTALL

COMPLETE BUS WRAP ALLOWANCE. PRICE MAY INCREASE OR DECREASE ALLOWANCE BASED ON FINAL DESIGN - 18K - CAR WRAP CITY HTTPS://CARWRAPCITY.COM/

(10)LH AND (10) RH FREEDMAN FAMILY 3PT 35" ACTIVITY SEATS WITH LEVEL 5 PREVAIL BLACK UPHOLSTERY - INSTALLED CBC

Financial Summary 2027 CE SCHOOL BUS (PB110)

October 31, 2025

(US DOLLAR)

<u>Description</u>	Price
Net Sales Price:	\$188,924.00

Prices are good for 30 days from the date of this proposal. Price does not include Buy Board fee of \$800 per purchase order, please add if applicable for Buy Board contract 722-23.

PRICE PER BUS: \$188,924.00

ESTIMATED DELIVERY TERMS: 300-365 Days from receipt of a purchase order. Longhorn Bus Sales will not be held responsible for material shortages or delays due to any global pandemic or any other reasons outside of our control, that of the represented OEM (IC Corp) or third-party vendors used to complete a customers' bus order. **Any buses ordered will be subject to any and all applicable surcharges at the time of build, due to market volatility. Any applicable surcharges will be the buyers responsibility. **A bus order may be delivered without OEM or third-party products (i.e., A/C, GPS, two-way radios, camera surveillance equipment, etc.), and any such items will be installed immediately upon availability. Due to industry constraints, quote pricing may fluctuate.

Potential shortages/delays will not hold up invoicing and/or payment. Instructions for payment of invoices will be provided upon invoicing. Please AVOID wiring any funds to previous accounts. Due to new ownership by Holt Truck Centers, please contact Ashley Schrader at 713-631-9306 for payment instructions.

By signing this document in acceptance of an order, the customer acknowledges that all equipment listed within this document is correct. Longhorn Bus Sales will not be responsible for any miss-built units. Any changes to what is listed herein, may result in additional charges to an order.

Signing this proposal will not be accepted in place of a purchase order. A purchase order is required to initiate any new bus order. If your agency does not use purchase orders, please sign this proposal and prepare a written letter of intent noting the need to place your order for the specific equipment desired.

Approved by Seller:	Accepted by Purchaser:
Official Title and Date	Firm or Business Name
Authorized Signature	Authorized Signature and Date
This proposal is not binding upon the seller without Seller's Authorized Signature	
	Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

October 31, 2025

Financial Summary 2027 CE SCHOOL BUS (PB110)


The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.

BODY PLAN ID: AABU0000K2 PB11000, 33 ft 5 in, CAP 40 Last Update: 2025/10/15 15:59:03 CDT Order Date: 2025-10-15 Build Date: 2025-12-10

Status: COMPLETE

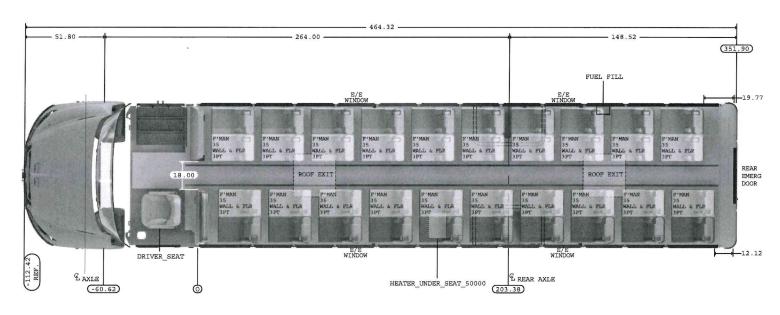

HIP-TO-KNEE SPACING (INCHES)+/-0.5"										
SEATS	1	2	3	4	5	6	7	8	9	10
RIGHT	28.33	26.82	26.82	26.82	26.82	26.82	26.82	26.28	26.82	26.82
LEFT	28.58	27.07	27.07	27.07	27.07	27.07	27.07	27.07	27.07	27.07