


No. \_\_\_\_\_



## UNITED INDEPENDENT SCHOOL DISTRICT AGENDA ACTION ITEM

**TOPIC** Approval of Request from Pat Campos for Use of Board of Trustees Discretionary Funds for John B. Alexander High School for \$4,635.00

**SUBMITTED BY:** Pat Campos **OF:** Board Member

**APPROVED FOR TRANSMITTAL TO SCHOOL BOARD:** \_\_\_\_\_

**DATE ASSIGNED FOR BOARD CONSIDERATION:** September 16, 2009

**RECOMMENDATION:**

It is recommended that the United ISD Board of Trustees approve a request for use of Board of Trustees Discretionary Funds for John B. Alexander High School for \$4,635.00

**RATIONALE:**

**BUDGETARY INFORMATION**

**BOARD POLICY REFERENCE AND COMPLIANCE:**



**United Independent School District  
Board of Trustees Discretionary Funds Request Form  
Fiscal Year 2008-2009**

Requesting Campus: Alexander High School

Campus Principal: Dolores W. Barrera

Board Member: PAT Campos

Description of Request: Since we can no longer use the cafeteria facilities to get ice after hours it is important that we have an ice machine available for our athletic department.

Estimated Cost of Request \$ 4635.00

Principal Signature: Dolores W. Barrera Date 8-25-09

Board Member Approval: Yes  No

Board Member Signature: \_\_\_\_\_ Date \_\_\_\_\_

Superintendent Signature: \_\_\_\_\_ Date \_\_\_\_\_

Board Approval: Yes  No  Date Approved: \_\_\_\_\_

Please return the completed form to the Superintendent's Office for final processing.



# S.T.E.D., INC.

SOUTHWEST TEXAS EQUIPMENT DISTRIBUTORS

## Quotation

8/17/2009

**To:**

UNITED ISD  
MARIO SALDIVAR  
3501 E. SAUNDERS  
LAREDO, TX 78045  
Phone: (956) 473-7933  
Fax: (956) 473-5997

**Project:**

UNITED I.S.D.  
ATTN: PURCHASING DEPT.  
3501 E. SAUNDERS  
LAREDO, TX 78041  
Phone: (956) 473-7933  
Fax: (956) 473-7950

**From:**

S.T.E.D.  
Richard Mendoza  
SALES  
1126 S. ST. MARY'S  
SAN ANTONIO, TX 78210  
Phone: (210) 354-0691  
Fax: (210) 354-0746  
Email: richard@sw:ed.com

Item	Qty	Description	Sell Each	Sell Total
4	1	ea <b>WATER FILTER ASSEMBLY</b> Cuno Model No. ICE140-S Packed: 2 pieces 3M Valve-In-Head Water Filter System w/Gauge, single vessel, for bacteria, sediment, chlorine taste & odor, cyst, scale, 0.2 micron rating, 2.1 gallons per minute (7.9 lpm) flow rate, 25,000 gal (94,635 lit) capacity, for ice machines Weight: 4.45 lbs. total	186.00	186.00
<b>Extended Total for Item No. 4:</b>				<b>\$186.00</b>
9	1	ea <b>ICE MAKER, NUGGET COMPRESSED</b> Hoshizaki Model No. F-801MAH-C Packed: each Ice Maker, Cubelet-Style, air-cooled, self-contained condenser, approximately 752-lb production/24 hours, stainless steel finish, compressed cubelet style ice, R-404A refrigerant, 115v/60/1	3,118.00	3,118.00
1	ea	2-Year parts & labor on entire machine		
1	ea	5-Year parts on compressor & air-cooled condenser		
1	ea	B-700PF Ice Bin, top-hinged front-opening door, approximately 550-lb ice storage capacity, for top-mounted ice makers, vinyl clad, painted legs included, protected w/HoshiGuard antimicrobial agent	764.00	764.00
1	ea	HS-2035 Top Kit, 22"	70.00	70.00
1	ea	2-Year parts & labor for bin		
Weight: 405 lbs. total			Freight:	125.00
<b>Extended Total for Item No. 9:</b>				<b>\$4,077.00</b>

x3

558

\$4635<sup>00</sup>/<sub>x3</sub>

8/17/2009

Merchandise	4,263.00
Total	4,263.00

Prices Good Until 9/4/2009

---

No merchandise will be accepted for return without our written permission and will be subject to re-stocking and handling charges of 15-30%, Special order items require a 50% deposit, and are NON-RETURNABLE AND NON-REFUNDABLE.  
NO ASSEMBLY, PLUMBING, OR ELECTRICAL INSTALLATION IS INCLUDED, UNLESS OTHERWISE INDICATED.

Quoted prices guaranteed for 30 days from date listed.

REGULATED BY THE TEXAS DEPARTMENT OF LICENSING AND REGULATION, P.O. BOX 12157, AUSTIN TEXAS 78711  
(800) 803-9202, (512) 463-6599 TEXAS REFRIGERATION LICENSE-TACLB012751R & TACLB018854C

THANK YOU FOR ALLOWING S.T.E.D. IN QUOTING YOU THESE PRICES.

RICHARD MENDOZA  
SALES REPRESENTATIVE



Hoshizaki reserves the right to change specifications without notice.

# F-801M\_H-C

## MODULAR CUBELET ICE MACHINE

### SLIM-LINE SERIES

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on <CL

F-801M\_H-C  
5/06  
Item # 13056

**CUBELET DIMENSIONS**  
W x D x H

**F-801M\_H-C**  
22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>

B-300


B-500

B-700

B-800

B-900

Also available on Large Bins:  
B-1150SS  
B-1300SS  
B-1600SS  
B-1650SS

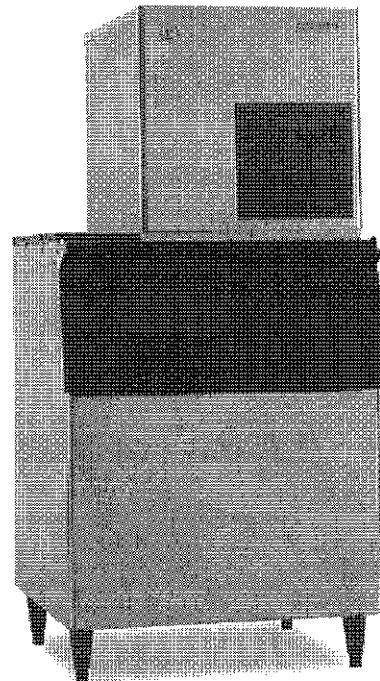


**F-801MAH-C**

Air-Cooled  
Shown on an optional  
B-500

**F-801MWH-C**

Water-Cooled

- \* Up to 752 lbs. of ice production per 24 hours
- \* Durable stainless steel exterior
- \* CleanCycle 12® Design 
- \* 15 minute flush cycle every 12 hours
- \* Removes sediment
- \* Cleaner ice
- \* Longer life and easy maintenance
- \* Removable air filters (Air-cooled model only)
- \* R-404A Refrigerant



**Warranty**

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Two Year** - Parts & Labor on entire machine.

**Five Year** - Parts on compressor.

© HOSHIZAKI AMERICA, INC.

518 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-436-6087

FAX 1-800-345-1325

www.hoshizaki.com



# F-801M\_H-C CUBELET ICE MACHINE SLIM-LINE SERIES

**DIMENSIONS**  
W x D x H  
**F-801M\_H-C**  
22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>

- Air-cooled
- Water-cooled

**AIR-COOLED**

<b>Water Temp* F.</b>	<b>50°</b>	<b>70°</b>	<b>90°</b>
<b>Air Temp* F.</b>	<b>70°</b>	752	688
	<b>80°</b>	650	580
	<b>90°</b>	548	490

**WATER-COOLED**

<b>Water Temp* F.</b>	<b>50°</b>	<b>70°</b>	<b>90°</b>
<b>Air Temp* F.</b>	<b>70°</b>	645	608
	<b>80°</b>	596	574
	<b>90°</b>	563	541

**UTILITY CONSUMPTION**


Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-801MAH-C	5.1	12.0
F-801MWH-C	4.7	12.0

**SPECIFICATIONS**


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-801MAH-C	Air-Cooled	13.3	20	205 lbs.
F-801MWH-C	Water-Cooled	11.5	20	205 lbs.

**STORAGE BINS**


Model Number	Application Capacity	ARI-Rated Capacity
B-300	300 lbs.	260 lbs.
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	560 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1635 lbs.	N/A




FRONT VIEW




SIDE VIEW



ICE DROP ZONE

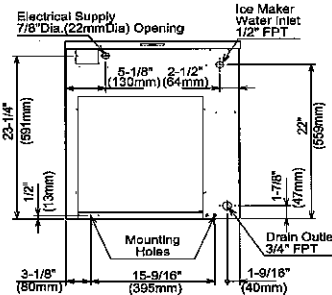

AIR-COOLED UNIT

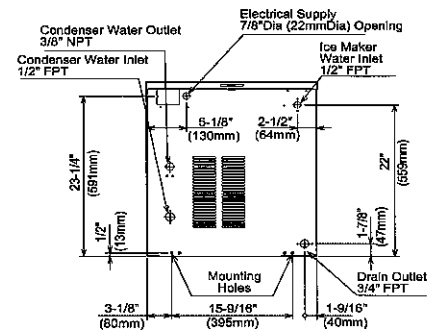

WATER-COOLED UNIT

**ELECTRICAL & PLUMBING/F-801M\_H-C**

- 115-120V/60/1
- 20 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent water supply
- 3/4" FPT independent drain connection

**OPERATING LIMITS**

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

**SERVICE**

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-Cooled model only)

UL NSE ISO  
© HOSHIZAKI AMERICA, INC.  
618 Hwy. 74 S. Peachtree City, GA 30269

TEL 1-900-438-60E7

FAX 1-800-845-1926

www.hoshizaki.com

Printed in U.S.A.



Hoshizaki reserves the right to change specifications without notice.

# PF/SF BINS

## ICE STORAGE BIN SERIES

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

**PF/SF BINS**  
2/09  
Item # 13163

**BIN DIMENSIONS**  
W x D x H

**B-250PF**  
30 x 32<sup>1/2</sup> x 33<sup>3/8</sup>"

**B-300PF/SF**  
22 x 32<sup>1/2</sup> x 46"


**B-500PF/SF**  
30 x 32<sup>1/2</sup> x 46"

**B-700PF/SF**  
44 x 32<sup>1/2</sup> x 46"

**B-800PF/SF**  
48 x 32<sup>1/2</sup> x 46"

**B-900PF/SF**  
52 x 32<sup>1/2</sup> x 46"

\*with 6" adj. legs

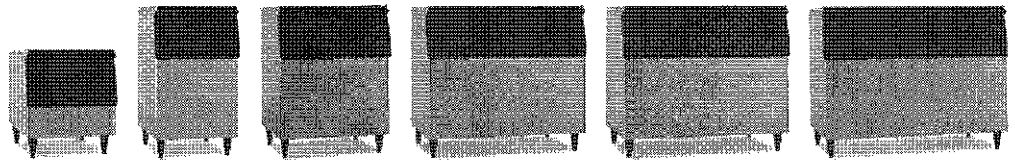

B-250PF

B-300PF  
B-300SF

B-500PF  
B-500SF

B-700PF  
B-700SF

B-800PF  
B-800SF

B-900PF  
B-900SF

**PF** - PVC Coated Galvanized Steel Finish  
**SF** - Stainless Steel Finish


**PF BINS**

- \* Ice storage capacity from 250 lbs. up to 900 lbs.
- \* Vinyl clad galvanized steel cabinet exterior design for easy cleaning

**SF BINS**

- \* Ice storage capacity from 300 lbs. up to 900 lbs.
- \* Stainless steel exterior design for easy cleaning

**PF/SF BINS**

- \* Protected by *HoshiGuard* Antimicrobial Agent 
- \* Long lasting attractive appearance
- \* Polyethylene bin liner for sanitary storage
- \* Sturdy construction for side by side or stacked ice machine installation
- \* Foamed-in-place polyurethane insulation, in all bin walls and bottom, provides dependable ice storage



**Warranty**

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Two Year - Parts & Labor.**



© HOSHIZAKI AMERICA, INC.

518 Hwy 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.Hoshizaki.com

## PF/SF BINS ICE STORAGE BIN SERIES



- B-250PF**
- B-300PF/SF**
- B-500PF/SF**
- B-700PF/SF**
- B-800PF/SF**
- B-900PF/SF**

- Up to 230 lbs. of ice storage
- Up to 260 lbs. of ice storage
- Up to 360 lbs. of ice storage
- Up to 550 lbs. of ice storage
- Up to 600 lbs. of ice storage
- Up to 660 lbs. of ice storage

### ICE STORAGE BIN APPLICATION

Model Number	Application Capacity Storage	ARI-Rated Storage Capacity	Dimensions W x D x H	Shipping Weight
B-250PF	250 lbs.	230 lbs.	30" x 32 <sup>1/2</sup> " x 33 <sup>3/8</sup> "	130 lbs.
B-300PF/SF	300 lbs.	260 lbs.	22" x 32 <sup>1/2</sup> " x 46"	135 lbs.
B-500PF/SF	500 lbs.	360 lbs.	30" x 32 <sup>1/2</sup> " x 46"	155 lbs.
B-700PF/SF	700 lbs.	550 lbs.	44" x 32 <sup>1/2</sup> " x 46"	200 lbs.
B-800PF/SF	800 lbs.	600 lbs.	48" x 32 <sup>1/2</sup> " x 46"	210 lbs.
B-900PF/SF	900 lbs.	660 lbs.	52" x 32 <sup>1/2</sup> " x 46"	220 lbs.




\*height includes 6" adj. legs




**B-250PF**  
22 x 32<sup>1/2</sup> x 33<sup>3/8</sup>  
W x D x H

### ICE MACHINE MODEL APPLICATION


Bin	22" Width KM-320M KM-481M KM-515M KM-600M KM-650M F-450M F-801M F-1001M	30" Width KM-961M KM-1340M KM-1601M KML Series F-1500M F-2000M KMD-700M KMD-850M KMD-901MRH KMD-901MWH KMS Series*	44" Width 2 KM-32CM 2 KM-481M 2 KM-515M 2 KM-60CM 2 KM-65CM 2 F-450M 2 F-801M 2 F-1001M	48" Width KM-1301S KM-1600S KM-1601S KM-1900S KM-2000S KM-2400S
22" Width B-300PF/SF	No Top Kit Needed			
30" Width B-250PF B-500PF/SF	Need HS-2033	No Top Kit Needed NEED HS-2129		
44" Width B-700PF/SF	Need HS-2035	Need HS-2034 NEED HS-2130 & HS-2034	No Top Kit Needed	
48" Width B-800PF/SF	Need HS-2035 & HS-2032	Need HS-2034/2032 NEED HS-2131 & HS-2034/2032	Need HS-2033	No Top Kit Needed
52" Width B-900PF/SF	Need HS-2035 & HS-2033	Need HS-2035 NEED HS-2132 & HS-2035	Need HS-2033	Need HS-2032




**B-300PF/SF**  
22 x 32<sup>1/2</sup> x 46  
W x D x H




**B-500PF/SF**  
30 x 32<sup>1/2</sup> x 46  
W x D x H



**B-700PF/SF**  
44 x 32<sup>1/2</sup> x 46  
W x D x H



**B-800PF/SF**  
48 x 32<sup>1/2</sup> x 46  
W x D x H



**B-900PF/SF**  
52 x 32<sup>1/2</sup> x 46  
W x D x H

\* KMS Series on bin application additionally requires HS-C224 (Mechanical Bin Control Extension)  
Top Kit Extensions - HS-2129 - for use with B-500 bins  
HS-2130 - for use with B-700 bins  
HS-2131 - for use with B-800 bins  
HS-2132 - for use with B-900 bins



© HOSHIZAKI AMERICA, INC.

518 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

